

INDUSTRIAL OPEN FRAME LCD MONITOR



Open Frame, 13.3"-1920x1080
LED-300nits,WV(178/178),VGA, DVI, AC-IN
w/ Built-in 9~36V DC PWR

Model: EOP1330HDV1

FEATURES:

- Implementing modularized mechanical design facilitates adaptable product configurations and simplified maintenance.
- Equipped with an auto-brightness sensor, it is suitable for both day and night applications.
- The VGA connector comes with optional AV, SV, and AV-looping capabilities.
- We also offer comprehensive custom designs and solutions tailored to the specific needs of OEM customers.

SPECIFICATIONS:






Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 13.3" viewable diagonal area	
	Active Area / Pixel Pitch	293.76(H) x 165.24(V) mm / 0.1529 (H) x 0.1529 (V)mm	
	Native Resolution / Colors	1920(H) x 1080(V) / 16.7M	
	Brightness / Contrast	300 cd/m ² (typ) / 700 : 1	
	Response Time	< 14 ms	
	Viewing Angle (typical)	H.170° (- 85° ~ + 85°) , V. 170° (- 85° ~ + 85°)	
	Light Source	LED backlight, Long life, 35,000 hrs (typ)	
Input Sources	PC System	Signal	Analog RGB (0.7/1.0 V _{p-p} , 75 ohms)
		Sync	Separate Sync, Composite Sync, Sync On Green
		Frequency	F _h : 30 - 82Khz , F _v : 50 -75Hz
Audio System	2W speaker x 2		
Input Terminals	1 x VGA , 1 x DVI, 1 x PC Audio (Stereo Headphone Jack) , 1 x DC Power Plug		
Convenient Features	Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)		
	OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)		
Power	AC-IN with 9-36V Built-in PWR		
Power Consumption	Operation / Power Saving	12.5 watt , < 1 watt (Support DPMS)	
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)	
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation)	
Certification	FCC , CE		
Dimensions	Physical	Please refer to Drawing	
	Carton	W x H x D = TBD	
Weight	N.W. / G.W.	TBD	
Container Loaded	20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)	

**Specifications subject to change without notice, not responsible for typographical errors.*

Options	Touch	Video / TV	Enhanced Panel	Others
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Capacitive touch	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

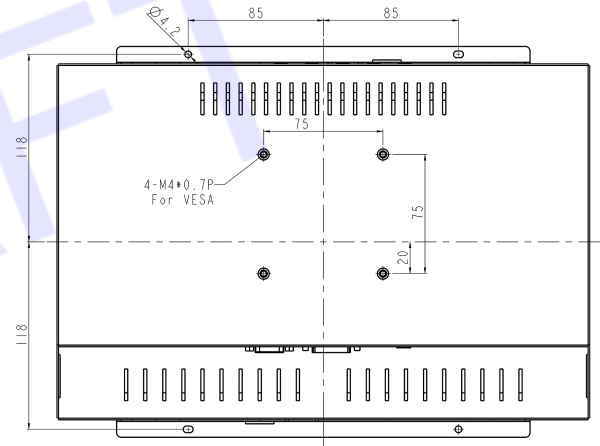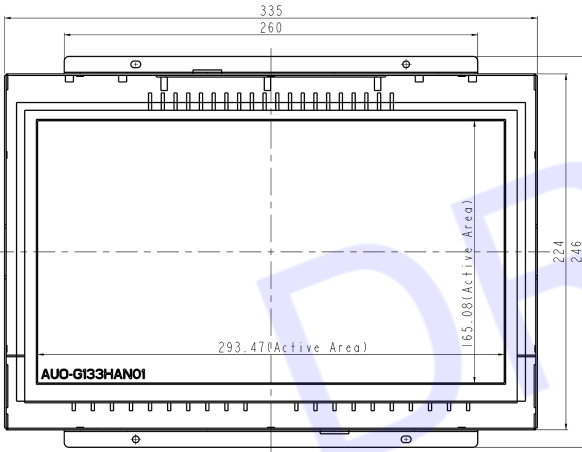

Drawing No.: EOP1330HDV1-12272023-V1