

# LOOSE KIT

Loose kit 15.6" LCD monitor, 1920 x 1080, 1000 nits, LED backlight with Projective Capacitive Touch (1-2mm) USB Controller, DA006: AD board VGA + HDMI Input

MODEL: EOPW1560HDHB-PCT-LT02



## FEATURES:

- LCD G156HAN01 x 1 + LVDS x 1
- Touchscreen x 1 + USB Controller, eDP 2 Lan x 1
- AD board HDMI +VGA x 1 , eDP x 1
- 4 x 18" Foam strips with adhesive
- Backlight Inverter Board x 1

## SPECIFICATIONS

Items	Unit	Specifications			
Screen Diagonal	[mm]	15.6"			
Active Area	[mm]	344.16x193.59			
Pixels H x V		1920x3(RGB)x1080			
Pixel Pitch	[mm]	0.17925x0.17925			
Pixel Format		R.G.B. Vertical Stripe			
Display Mode		AHVA, Normally Black			
White Luminance (ILED=50mA) <b>(Note: ILED is LED current)</b>	[cd/m <sup>2</sup> ]	1000 typ. (Center) 850 min. (Center)			
Contrast Ratio		800:1 (Typ.)			
Response Time	[ms]	25 (Typ.)			
Nominal Input Voltage VDD	[Volt]	+3.3 (Typ.)			
LCD Power Consumption	[Watt]	20.15 (Max)			
LED Power Consumption	[Watt]				
Weight	[Grams]	940g (Typ), 1035 (Max)			
Physical Size <b>Include bracket</b>	[mm]		Min.	Typ.	Max.
		Length	363.3	363.8	364.3
		Width	215.4	215.9	216.4
		Thickness		9.3	9.8
Electrical Interface		2 LaneDP			
Glass Thickness	[mm]	0.5			
Surface Treatment		Anti-glare, 3H			
Support Color		16.2M colors ( RGB 6-bits+ : >FRC)			
Temperature Range	[°C]	-10 to+60 -20 to +60			
Operating Storage (Non-Operating)	[°C]				

**\*Specifications subject to change without notice, not responsible for typographical errors.**


### \*\*\*Do not includes\*\*\*

- No Power adapter
- No US power cord
- No OSD
- HDMI and USB cables


*Note: Pack the LCD module in the Case only.*

# MECHANICAL DRAWINGS


This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

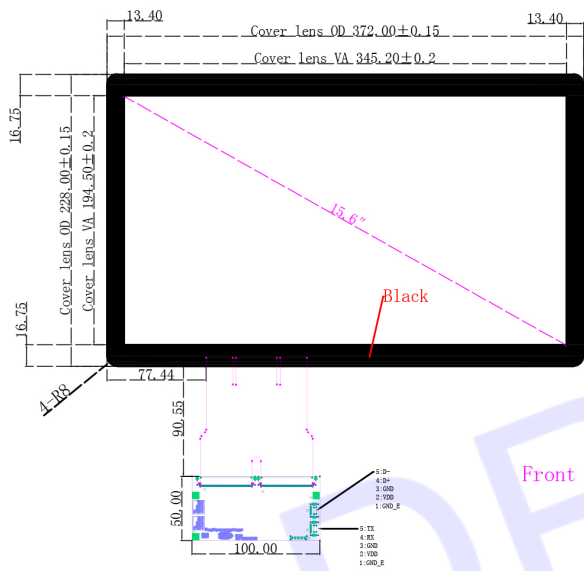

Front view

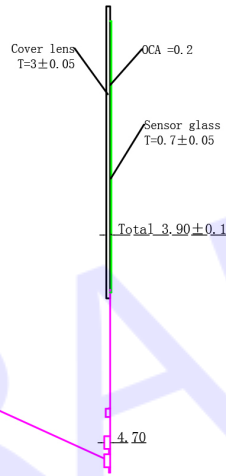

Side view

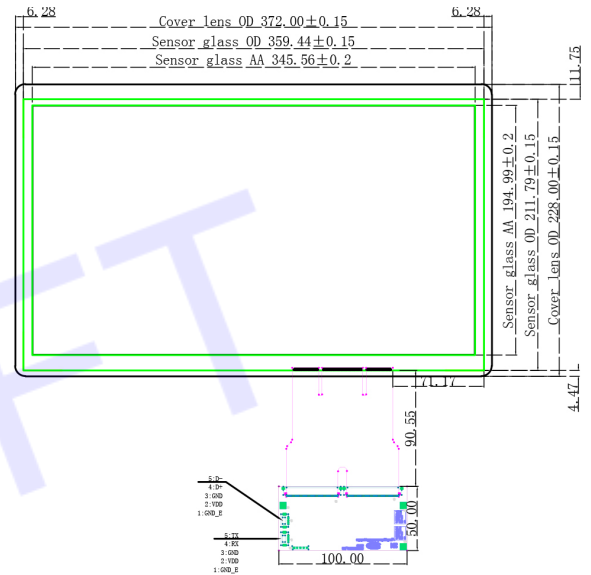

Back view

Drawing No.: EOPW1560HDHB-PCT-LT02-08162022-V1