


MULTI TOUCH - INDUSTRIAL OPEN FRAME LCD MONITOR

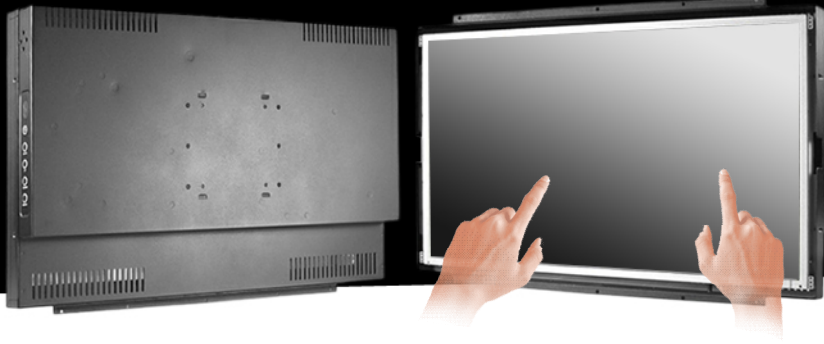

Open Frame, w24"-1920x1200, LED-400nits, VGA+HDMI+DVI
10 Point PCT Touch (3mm, USB, 10pts), 120 AC Input Power
Fan (91mm Model), 10 Point Touchscreen / USB

MODEL: EOPW2400-PCT9

FEATURES:

- Modularize mechanical design provides flexible product configuration and easy maintenance
- Projected Capacitive Touch, 10*Touch Points
- Available with auto-brightness sensor offers application in day and night
- VGA connector with optional AV,SV,AV-Looping
- Auto Power On: Monitor is always "ON" when connect to power.
- Auto Video Signal On: Monitor (Backlight) will turn off when no video signal, but it will Auto turn back on.

SPECIFICATIONS:

Cell Type	TFT LCD
Glass Surface	Black Anti-Glare, low reflection coating
Aspect Ratio	Wide
Size	24.1" viewable diagonal area
Active Area	518.4(H) x 324.0(V) mm
Pixel Pitch	0.27(H) x 0.27(V) mm
Native Resolution	1920(H) x 1200(V)
Colors	16.7 M
Brightness	400
Contrast	1000:1
Response Time	≤ 14 ms (G-to-G)
Viewing Angle (typical)	H. 178°(- 89°~ + 89°) , V. 178°(- 89°~ + 89°)
Light Source	LED backlight, Long life, 35,000 hrs (typ)






**Specifications subject to change without notice, not responsible for typographical errors.*

CERTIFICATION	
FCC , CE	
INPUT TERMINALS	
1x VGA, 1x DVI, 1x HDMI, 1x USB (Touch), 1 xPC Audio (Stereo Headphone Jack), 1 xDCPower Plug	
CONVENIENT FEATURES	
Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B) , OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)	
POWER	
120 AC Input Power	
POWER CONSUMPTION	
Operation / Power Saving	26 watt , < 1 watt (Support DPMS)
OPERATING CONDITION	
Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)
STORAGE CONDITION	
Temperature / Humidity	-20°C ~ 60°C (-4°F ~ 140°F) , 10%~ 90% (no condensation)
DIMENSIONS	
Physical	
Carton	W x H x D = TBD
WEIGHT	
N.W. / G.W.	12 Kgs/13.5 Kgs
CONTAINER LOADED	
20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)

TOUCH	VIDEO INPUT	ENHANCED PANEL	POWER	OTHERS
Resistive Touch	AV-IN	High Brightness Panel	24V DC-IN	Motion Sensor
Projected Capacitive Touch	AV Looping	Sunlight Readable	9~36V DC-IN	Light Sensor
Infrared Touch	HDMI / DP	Wide Viewing Angle	48V 72V DC-IN	VR-knob Dimming
Protected Glass	HD-SDI	Wide Temperature	90V 125V DC-IN	RS232 Remote On/Off
Optical Bonding		UV Film	110V 220V DC-IN	Military Connector: MIL 38999
		Anti-Vandal		Metal Connector: M12 / M16
				Stainless 316 Enclosure

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

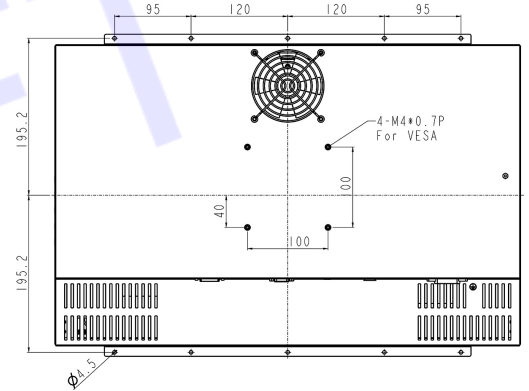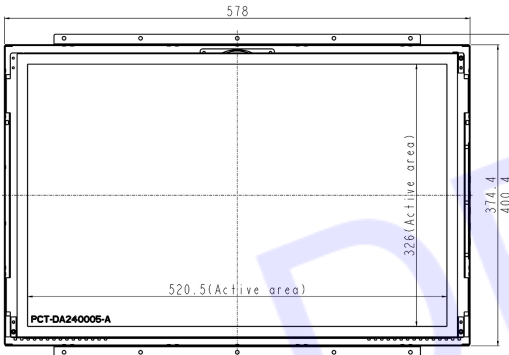

PWR USB HDMI VGA Audio DVI

Drawing No.: EOPW2400-PCT9-10282025-V1