

SUNLIGHT READABLE IP66 FRONT TRUE FLAT BEZEL

True Flat Bezel PCAP Touch thick is 1.8mm. Touch with USB Controller Dual touch Industrial Chassis/10.1" / 1280x800 / 1000nits / VGA+DVI+HDMI input / PCAP 10-points Touch with USB controller / Front IP66 / Panel mount / VESA mount



Model: LPMW1010HB-TCY



FEATURES:

- 10.1" Industrial Panel Mount Monitor
- 1280 x 800 WXGA Resolution
- 1000 nits High-Brightness LCD
- IP66 Front True-Flat Bezel
- 10-Point PCAP Touchscreen with USB Touch Controller
- VGA, DVI & HDMI Video Inputs
- Panel Mount & VESA Mount Compatible
- Wide Operating/Storage Temperature: -30°C to +85°C
- Rugged Industrial Design for Harsh Environments


SPECIFICATIONS:

Panel Type	10.1-inch TFT LCD
Screen Diagonal	10.1-inch
Active Display Area (mm)	216.96(H) x 135.6(V)
Pixel Pitch (mm)	0.1695 X 0.1695
Number of Pixels	1280 x 3(RGB) x 800
Contrast Ratio	800:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m²)	1000 cd/m²
Viewing Angle(Typ.)	85/85/85/85 (R/L/U/D)
Signal Connector	VGA + DVI + HDMI
Power Source	DC12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ 85°C
Storage Temperature	-30 ~ 85°C
Plug & Play	VESA DDC 1/2B
Touch Type	Projected Capacitive Touch
Transparency	90%(typ).
Hardness of surface	7H
Linearity	±1.5%(max).

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

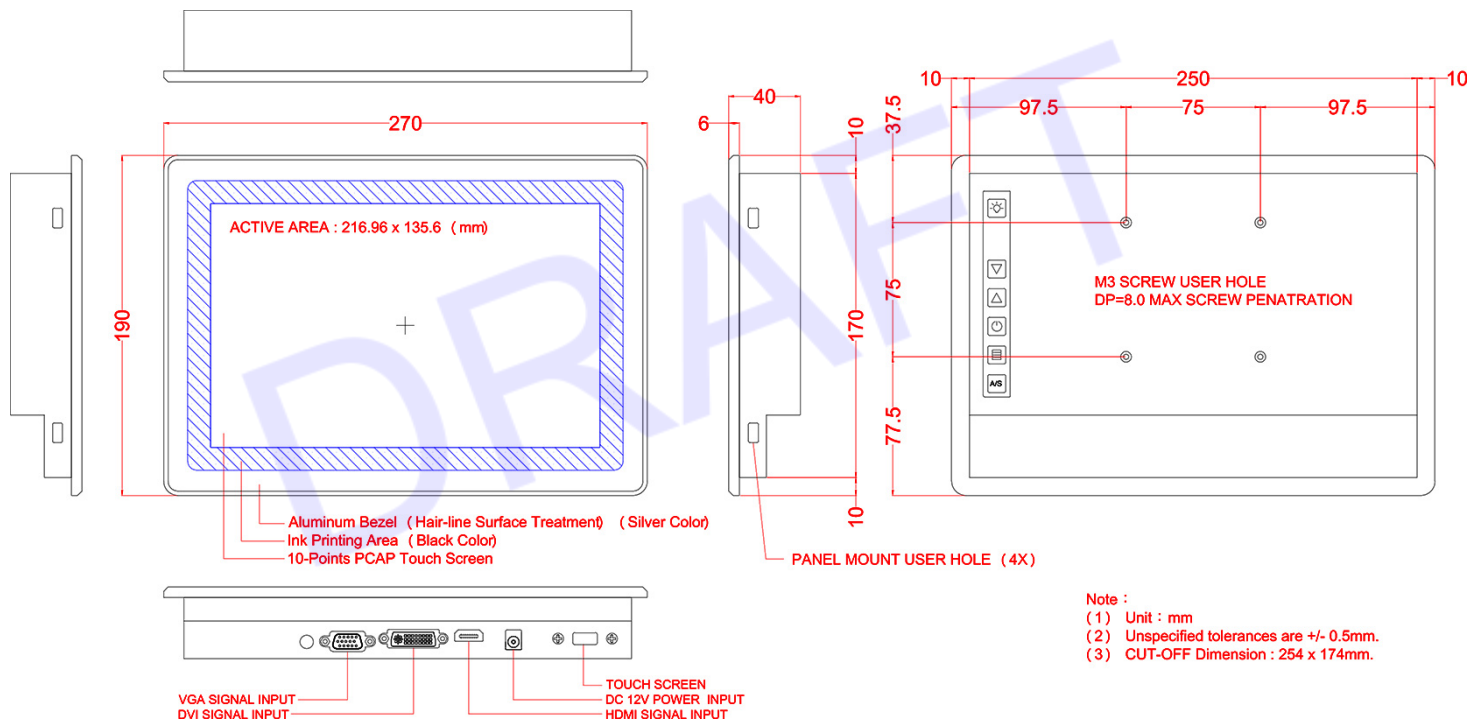

Drawing No.: LPMW1010HB-TCY-07262026-V1