

SUNLIGHT READABLE CHASSIS MOUNT LCD MONITOR

INDUSTRIAL TOUCH CHASSIS MOUNT

8.4" Chassis Touch LCD Monitor / 800x600 / 1000nits LED
VGA+DVI+HDMI Signal Input / 4-Wires Resistive Touch
with USB Controller / Front OSD / 2W Speaker x2



Model: YCH08400HB

FEATURES:

- TFT-LCD Monitor with support for resolutions up to 800*600 and high-contrast color display.
- Power management system complies with VESA DPMS and EPA Energy Star standards.
- Tailored for easy touch screen installation and application.
- Comes with a universal power adapter for convenience.
- Plug & Play compatibility with support for DDC1 & DDC2B.
- Advanced OSD control available for precise picture quality adjustment.
- Features a detachable stand for flexible wall-mounting adjustments.
- Robust monitor built with a durable steel frame.
- Custom design options available upon request.


SPECIFICATIONS

ITEM	SPECIFICATION
Panel Type	8.4-inch TFT LCD
Screen Diagonal	8.4-inch
Active Display Area (mm)	170.4(H) x 127.8(V)
Pixel Pitch (mm)	0.213x0.213
Number of Pixels	800x3(RGB) x 600
Contrast Ratio	600:1
Display Color	262K(6-bit) / 16.2M(8-bit)
Brightness (cd/m)	1000 cd/m (Without Touch Screen)
Viewing Angle(Typ.)	80 / 80 / 80 / 60 (R/L/U/D)
Signal Connector	15 PIN D-Sub,DVI,HDMI
Power Source	DC +12V(+/- 10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-5 ~ +60 °C
Storage Temperature	-30 ~ +70°C
Plug & Play	VESA DDC 1/2B
Touch Type	4-Wire Resistive Touch Screen (USB Type-A Interface)
Transparency	> 80% (typ.)
Hardness of surface	3H
Linearity	±1.5%(max.)
Speaker	2 Watts x 2

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

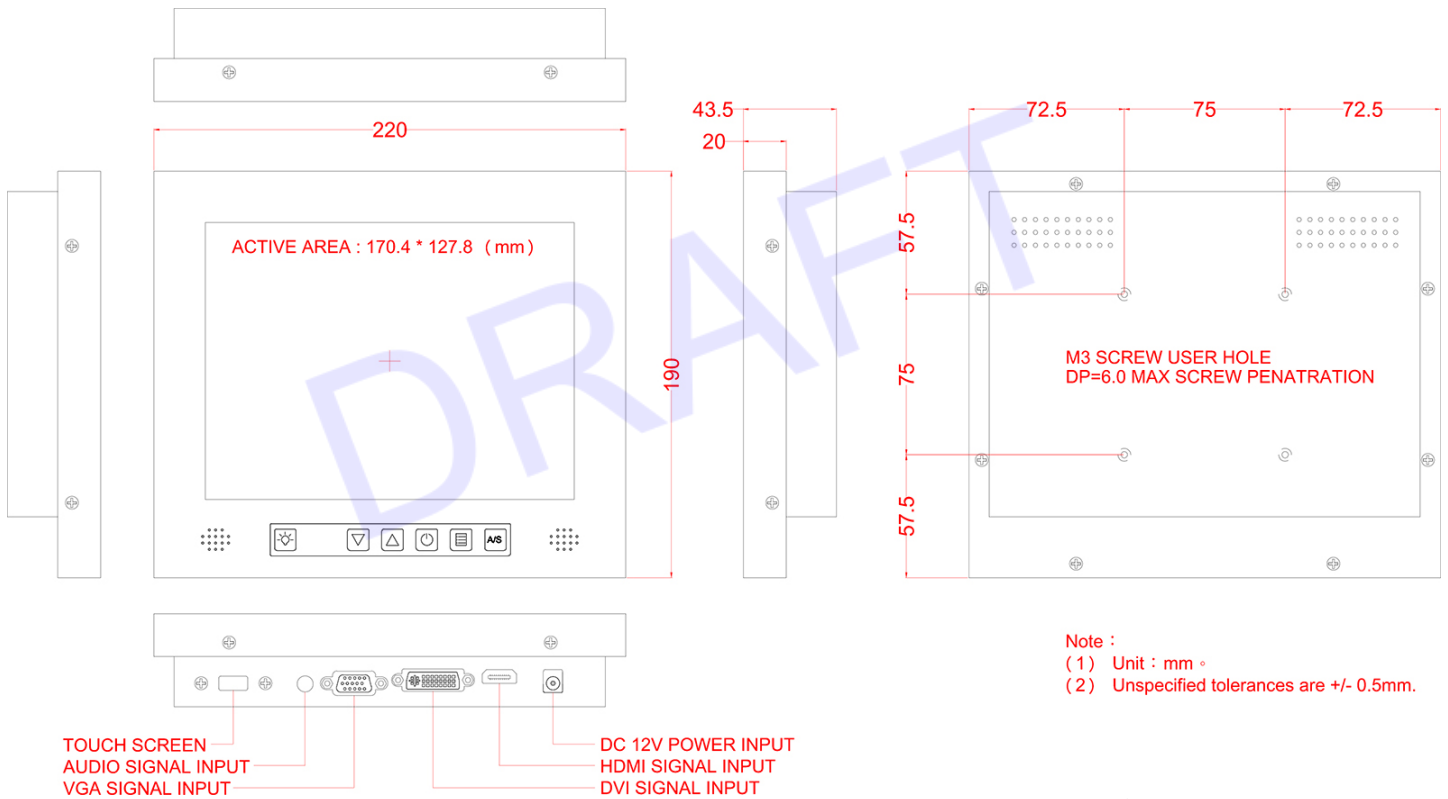

Note :
(1) Unit : mm °
(2) Unspecified tolerances are +/- 0.5mm.

Drawing No.: YCH08400HB-12272023-V1