

SUNLIGHT READABLE CHASSIS MOUNT STAINLESS STEEL HOUSING

19" Chassis LCD Monitor / Stainless Steel Housing / Front IP65 / 1280x1024
1500nits LED / VGA+DVI+HDMI signal input / DC 12V Power input with Power
Adapter / External Auto Light sensor / 2mm AR coating Glass / Power
Consumptions 42Watts / VESA Mount
Operating/ Storage Temp: -30°C ~ 70°C



Model: YCH1900HB2WT-SS

FEATURES:

- Sunlight Readable.
- LED Backlight.
- 19" TFT LCD with resolution up to 1280x1024
- Front IP65
- External Auto Light Sensor
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.



SYSTEM SPECIFICATIONS

Screen Size	19"
Active Area	376.32 (H) x 301.06 (V)
Pixels H x V	1280(x3) x 1024
Pixel Pitch	0.294 (per one triad) x 0.294
Pixel Arrangement	R.G.B. Vertical Stripe
Display Mode	Normally White
Brightness	1500nits
Contrast Ratio	1000 : 1 (Typ)
Viewing Angle	85/85/80/80
Signal Input	VGA, DVI, HDMI
Optical Response Time	10 ms(Typ, on/off)
Power Consumption	42W (Typ)
Support Color	16.7M colors (RGB 6-bit + Hi_FRC)
Temperature Range	
Operating Storage	-30°C ~ +70°C
(Non-Operating)	-30°C ~ +70°C
RoHS Compliance	RoHS Compliance

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

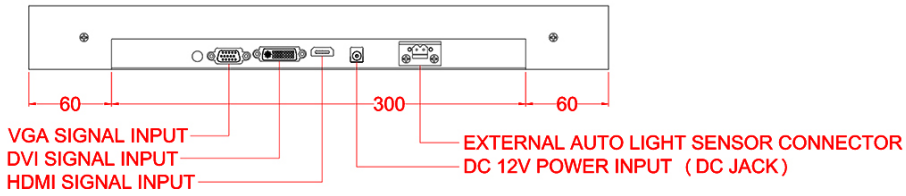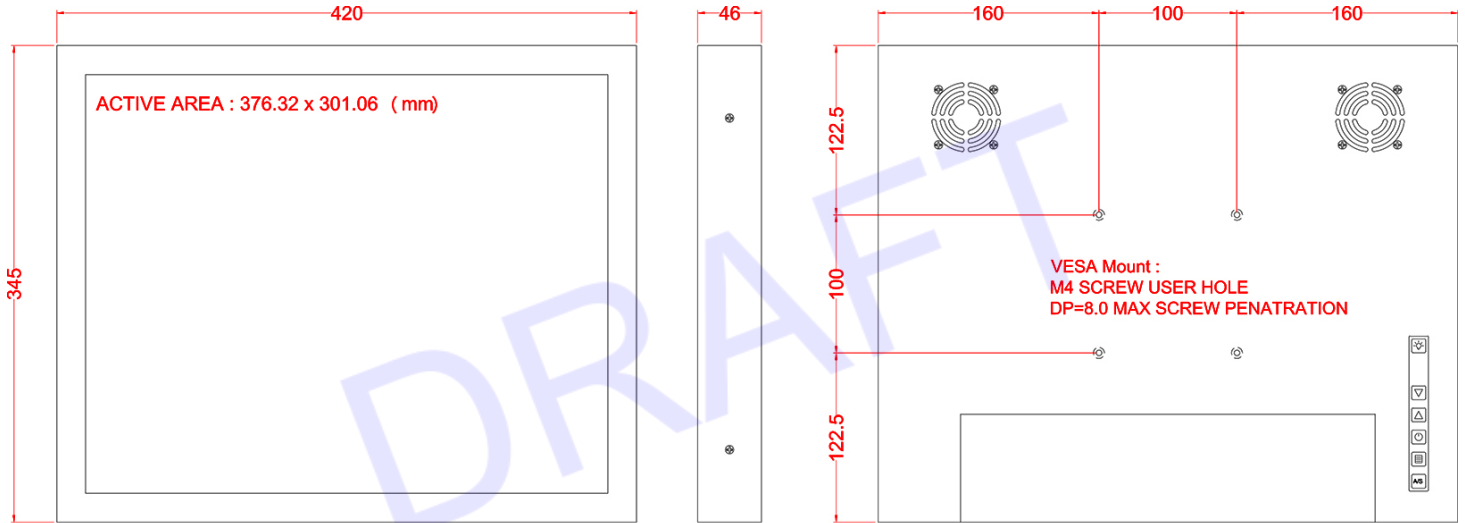

NOTE :
 (1) Unit : mm
 (2) Unspecified tolerances are +/- 0.5mm.

Drawing No.: YCH1900HB2WT-SS-08092023-V1