

# Flush/VESA Mount Metal Housing High Brightness TOUCH SCREEN AND USB CONTROLLER, FRONT OSD WITH HOT KEY

Flush Mount IP65 front 10.4" LCD monitor, Stainless steel front bezel, 800x600, LED-1500nits, VGA+DVI+HDMI input, WV(160°/130°), WT(-30~70C) with 5 Wire Resistive, 12V input with External 110/240AC Adapter.



## Model: YFM1040HBPFWT-TR

### FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 800\*600.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


### SPECIFICATIONS:

Panel Type	10.4-inch TFT LCD
Screen Diagonal	10.4-inch
Active Display Area (mm)	211.2 (H) x 158.4 (V)
Pixel Pitch (mm)	0.264 x 0.264
Number of Pixels	800 x 3(RGB) x 600
Contrast Ratio	700:1
Display Color	262K / 16.2M Colors
Brightness (cd/m)	1500 cd/m
Viewing Angle(Typ.)	80 / 80 / 60 / 70 ( R/L/U/D)
Signal Connector	VGA+DVI+HDMI input
Power Source	DC +12V(+/- 10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-20 ~ +70 °C
Storage Temperature	-30 ~ +80°C
Plug & Play	VESA DDC 1/2B
Touch Type	5-Wire Resistive Touch Screen (USB Interface)
Transparency	> 80% (typ.)
Hardness of surface	3H
Linearity	±1.5%(max.)
Front Bezel Material	Stainless Steel
IP Code	Front IP65

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

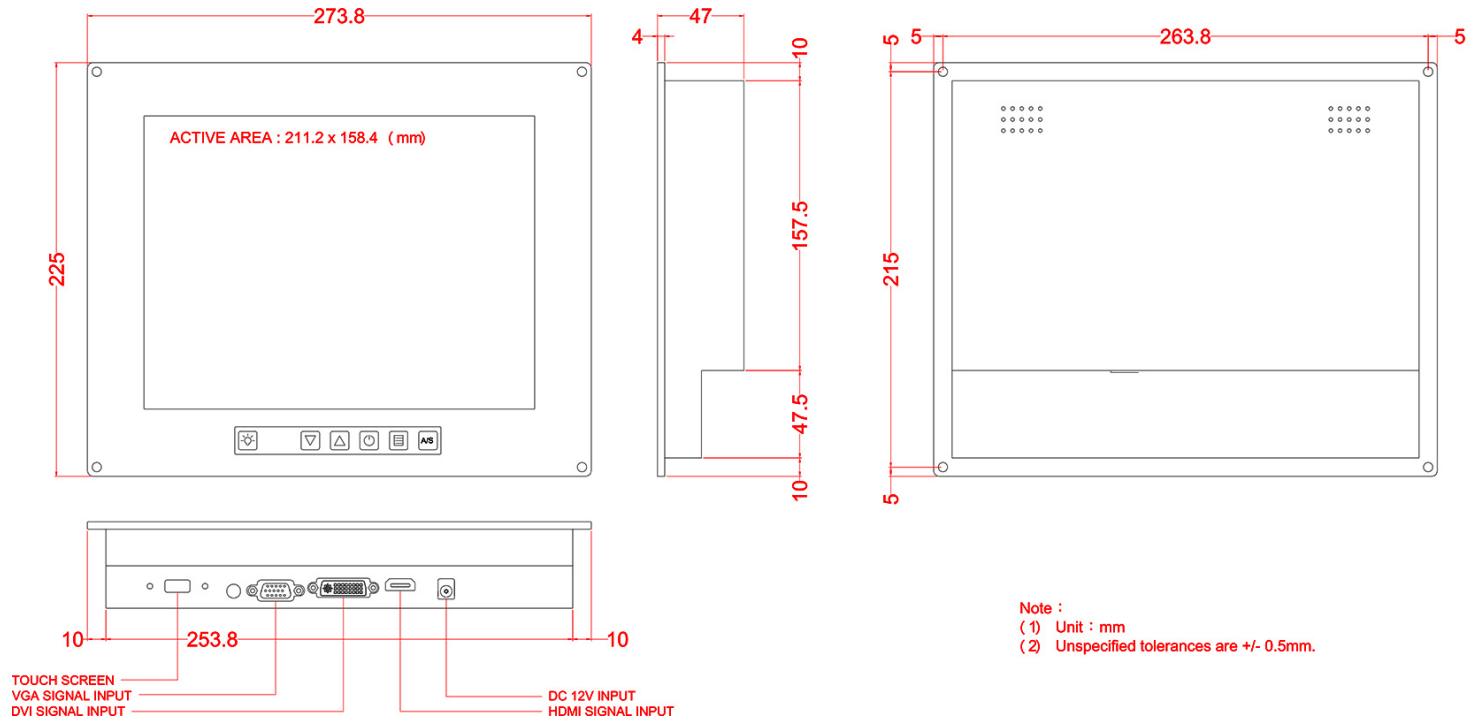

Note :  
 (1) Unit : mm  
 (2) Unspecified tolerances are +/- 0.5mm.