

FRONT IP65/NEMA4 6MM FRONT ALUMINUM BEZEL FLUSH MOUNT / PANEL MOUNT

21.3" TFT / 1600x1200 / 4:3 / 500nits LED / 1800:1 / 16.8 Million Colors
VGA+DVI+HDMI signal input / Operating Temp : 0 to 50C / AC 90~264V
Power Input / Power consumption : 36 Watts



Model: YFMF2130-IP

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1600*1200.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating
	Aspect Ratio / Size	4 : 3 / 21.3" viewable diagonal area
	Native Resolution / Colors	1600(H) x 1200(V) / 16.8 Million
	Brightness / Contrast	500nits/1800:1
	Response Time	^ 8 ms
	Viewing Angle (typical)	H. 160° (- 80° ~ + 80°) , V. 160°(- 80° ~ + 80°)
	Light Source	CCFL , Long life, 50,000 hrs (typ)
Input Terminals	1 x VGA (15 Pin Female D-Sub), 1xDVI, 1xHDMI, 1 x PC Audio (Stereo Headphone Jack), 1 x AC Outlet	
Convenient Features	Auto Calibration , Back Light Adjustment, Plug&Play (VESA DDC/CI, DDC 2B)	
	OSD Multi-Languages , Wall Mount Ready (VESA 100 x 100 mm)	
Power	Internal power supply with universal / Auto-Sensing, AC 90 to 264V, 50 / 60 Hz	
Power Consumption	Operation / Power Saving	36 watt, < 5 watt (Support DPMS)
Operating Condition	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F), 10% ~ 90% (no condensation)
Storage Condition	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F), 10% ~ 90% (no condensation)

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

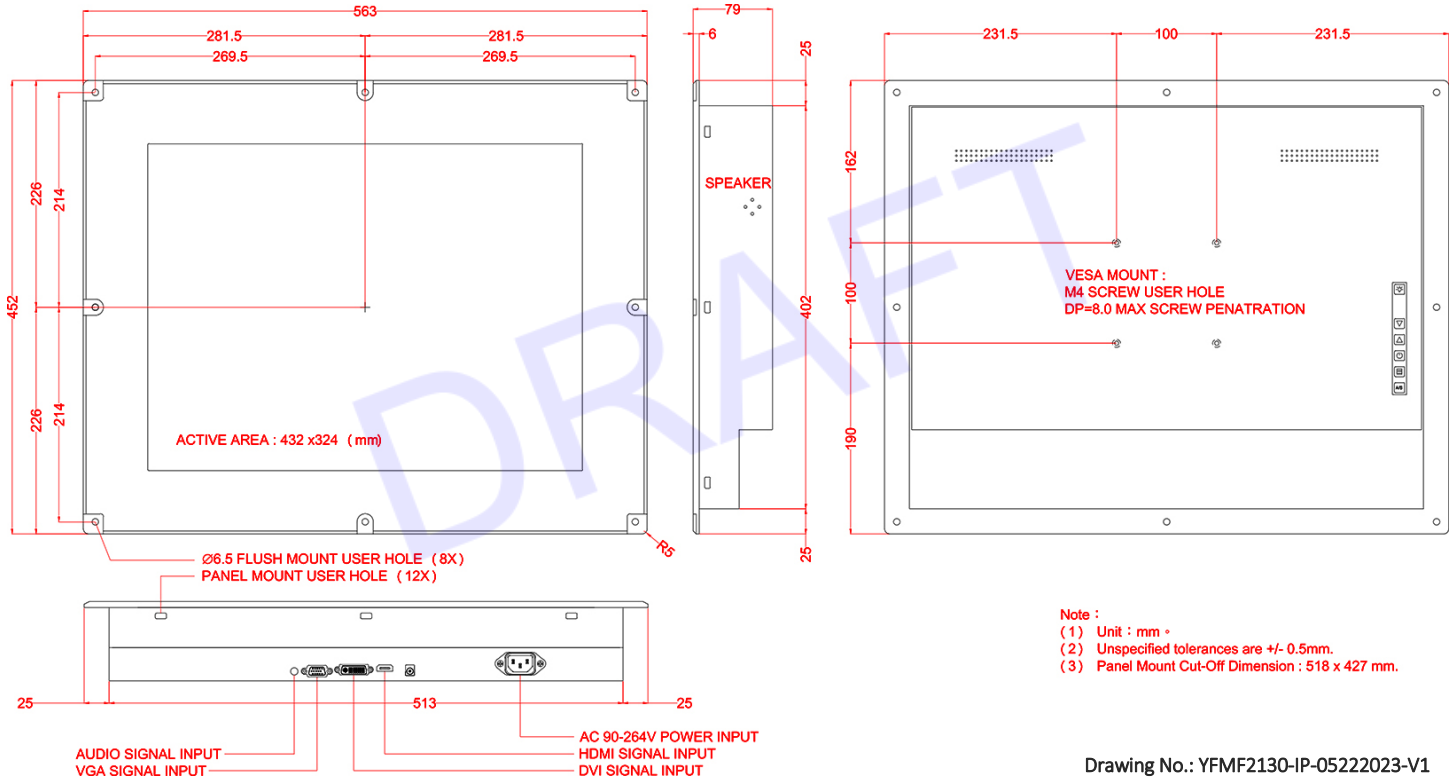

Drawing No.: YFMF2130-IP-05222023-V1