


SUNLIGHT READABLE OPEN FRAME LCD MONITOR

6.5" Open frame / 640x480 / 1500nits LED / VGA+DVI+HDMI Input
Power Consumption 6 Watts

Model: YOP0650HB2V2

1500nits



FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 640*480.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS:

ITEM	SPECIFICATION
Panel Type	6.5-inch TFT LCD
Screen Diagonal	6.5-inch
Active Display Area (mm)	132.48(H) x 99.36(V)
Pixel Pitch (mm)	0.207 x 0.207
Number of Pixels	640x3(RGB) x 480
Contrast Ratio	600:1
Display Color	262K(6-bit)/16.2M(8-bit)
Brightness (cd/m)	1500 cd/m
Viewing Angle(Typ.)	80 / 80 / 70 / 70 (R/L/U/D)
Signal Connector	15 PIN D-Sub,DVI-D,HDMI
Power Source	DC +12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-20 ~ +70°C
Storage Temperature	-30 ~ +80°C
Plug & Play	VESA DDC 1/2B
Power Consumptions	6 Watts

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

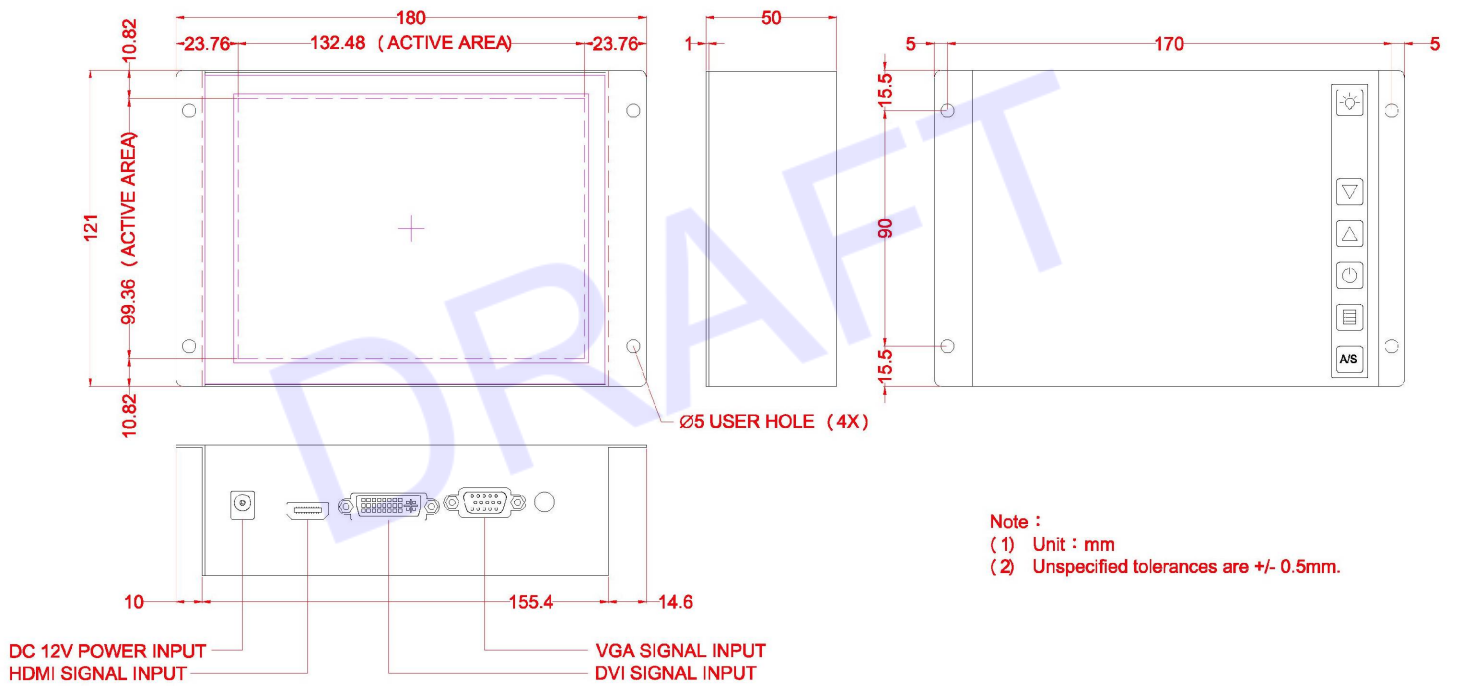

Drawing No.: YOP0650HB2V2-07172023-V1