


SUNLIGHT READABLE OPEN FRAME LCD

12.1" 1024 x 768, 1000nits LED Sunlight Readable High Brightness Wide Temperature -30C to 85C Rugged Industrial Open Frame LCD Monitor with VGA input. Power Consumption 7.2 Watts
+ 12.1" 5 Wires Resistive Touch with USB Controller

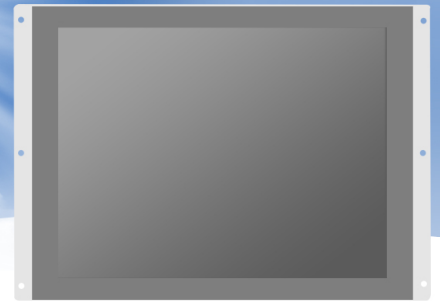

Model: YOP1210XWTHB-TR

FEATURES

- High contrast color TFT-LCD Monitor support resolution up to 1024*768.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS

| ITEM | SPECIFICATION |
|--------------------------|-----------------------------------------------|
| Panel Type | 12.1-inch TFT LCD |
| Screen Diagonal | 12.1-inch |
| Active Display Area (mm) | 245.76 (H)x 184.32 (V) |
| Number of Pixels | 1024x768 |
| Contrast Ratio | 700:1 |
| Display Color | 16.7M/262K colors |
| Brightness (cd/m) | 1000 cd/m (Without Touch Screen) |
| Viewing Angle(Typ.) | 80 / 80 / 70 / 70 (R/L/U/D) |
| Signal Connector | 15 PIN D-Sub(VGA) |
| Power Source | DC+12V(+/-10%) |
| Power Management | VESA DPMS Compliant |
| Operating Temperature | -20 ~ +70°C |
| Storage Temperature | -30 ~ +85°C |
| Plug & Play | VESA DDC 1/2B |
| Touch Type | 5-Wire Resistive Touch Screen (USB Interface) |
| Transparency | > 80% (typ.) |
| Hardness of surface | 3H |
| Linearity | ±1.5%(max.) |

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

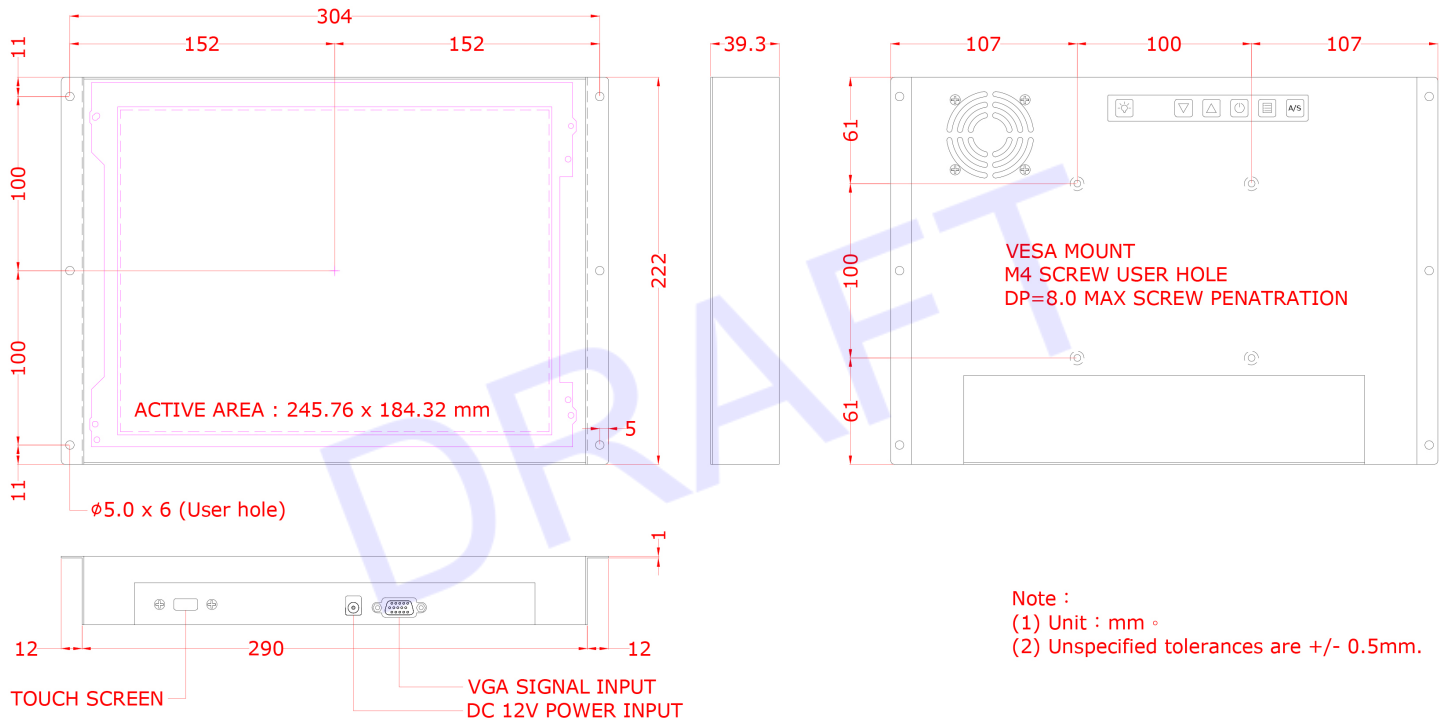

Drawing No.: YOP1210XWTHB-TR-09162022-V1