

Sunlight Readable Open Frame Highbrightness LCD

15" 1024 x768, 2000nits LED Sunlight Readable High Brightness Wide Temperature
-30C ~ 85C Rugged Industrial Open Frame LCD Monitor with VGA + DVI + HDMI
input include 12V 110/220V power adapter, Power consumption is 18watts.



Wide Temp: -30°C to 85°C

Model: YOP1500WTH3

FEATURES

- High contrast color TFT-LCD Monitor support resolution up to 1024*768.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS

Item	Specification
Panel Type	15.0-inch TFTLCD
Screen Diagonal	15.0-inch
Active Display Area (mm)	304.128(H) x228.096(V)
Number of Pixels	1024x768
Contrast Ratio	800:1
Display Color	16.2M/262K colors
Brightness (cd/m)	2000 cd/m
Viewing Angle(Typ.)	80 / 80 / 70 / 80 (R/L/U/D)
Signal Connector	VGA, DVI-D, HDMI
Power Source	DC+12V (+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ +85°C
Storage Temperature	-30 ~ +85°C
Plug & Play	VESA DDC 1/2B

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

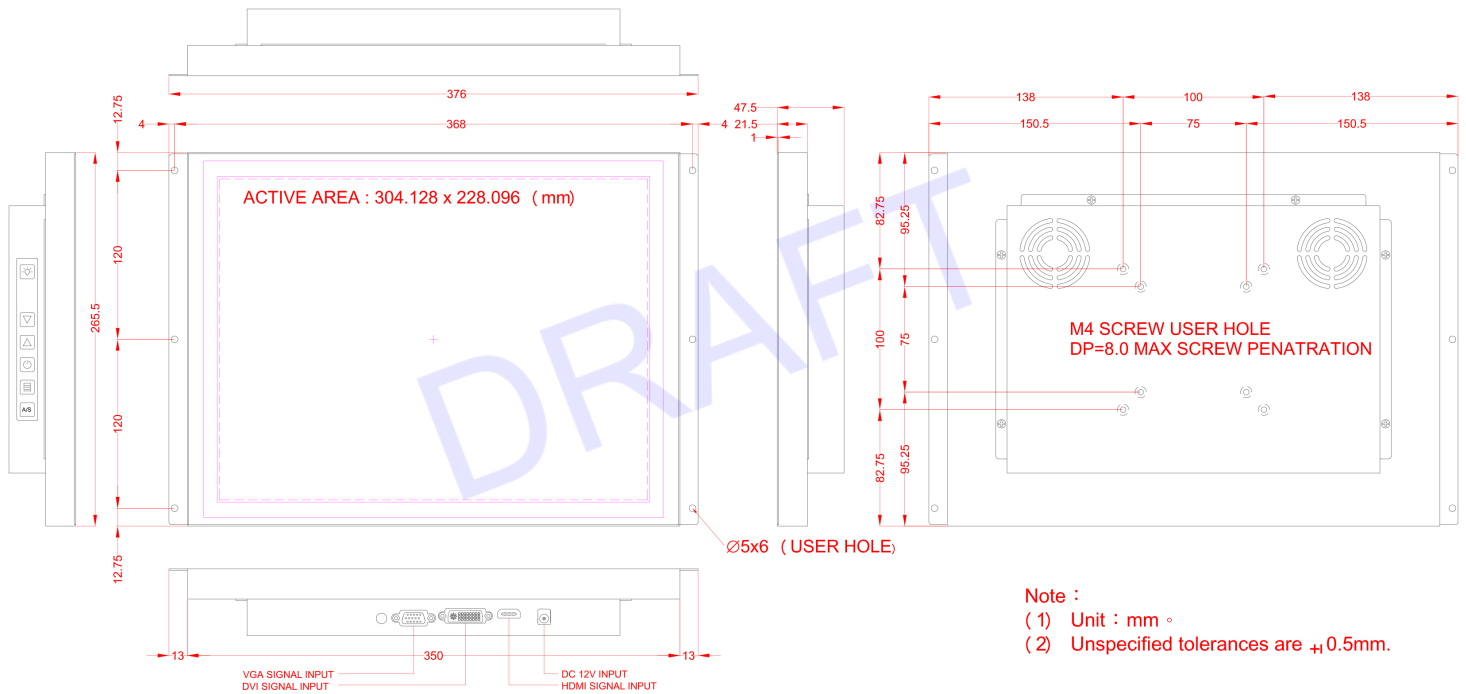

- Note :
- (1) Unit : mm °
 - (2) Unspecified tolerances are ± 0.5 mm.

Drawing No.: YOP1500WTH3-07202022-V1