

INDUSTRIAL OPEN FRAME LCD

Wide Temp -30C ~ 85C Open Frame, 17" LCD Monitor, 1280x1024, Super High brightness 1500 nits VGA + DVI-D and HDMI Input (Auto dimming control) (without RS232 control) + 17"- 5 Wires Resistive Touch with USB Controller

Model: YOP1700HB2WT-TR-V1



FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1280*1024.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.


SPECIFICATIONS:

Panel Type	17.0-inch TFT LCD
Screen Diagonal	17.0-inch
Active Display Area (mm)	337.920(H) × 270.336(V)
Pixel Pitch (mm)	0.264(per one triad) × 0.264
Number of Pixels	1280 × 3(RGB) × 1024
Contrast Ratio	800:1
Display Color	16.7M colors (RGB 6-bits +Hi-FRC data)
Brightness (cd/m ²)	1500 cd/m ² (With Touch Screen)
Viewing Angle(Typ.)	80 / 80 / 60 / 80 (R/L/U/D)
Signal Connector	VGA + DVI-D and HDMI Input
Power Source	DC +12V(+/- 10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ +85 °C
Storage Temperature	-30 ~ +85 °C
Plug & Play	VESA DDC 1/2B
Touch Type	5-Wire Resistive Touch Screen (USB Interface)
Transparency	>80%(typ).
Hardness of surface	3H
Linearity	±1.5%(max).
Brightness Adjustment	Brightness Adjustment

*Specifications subject to change without notice, not responsible for typographical errors.

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

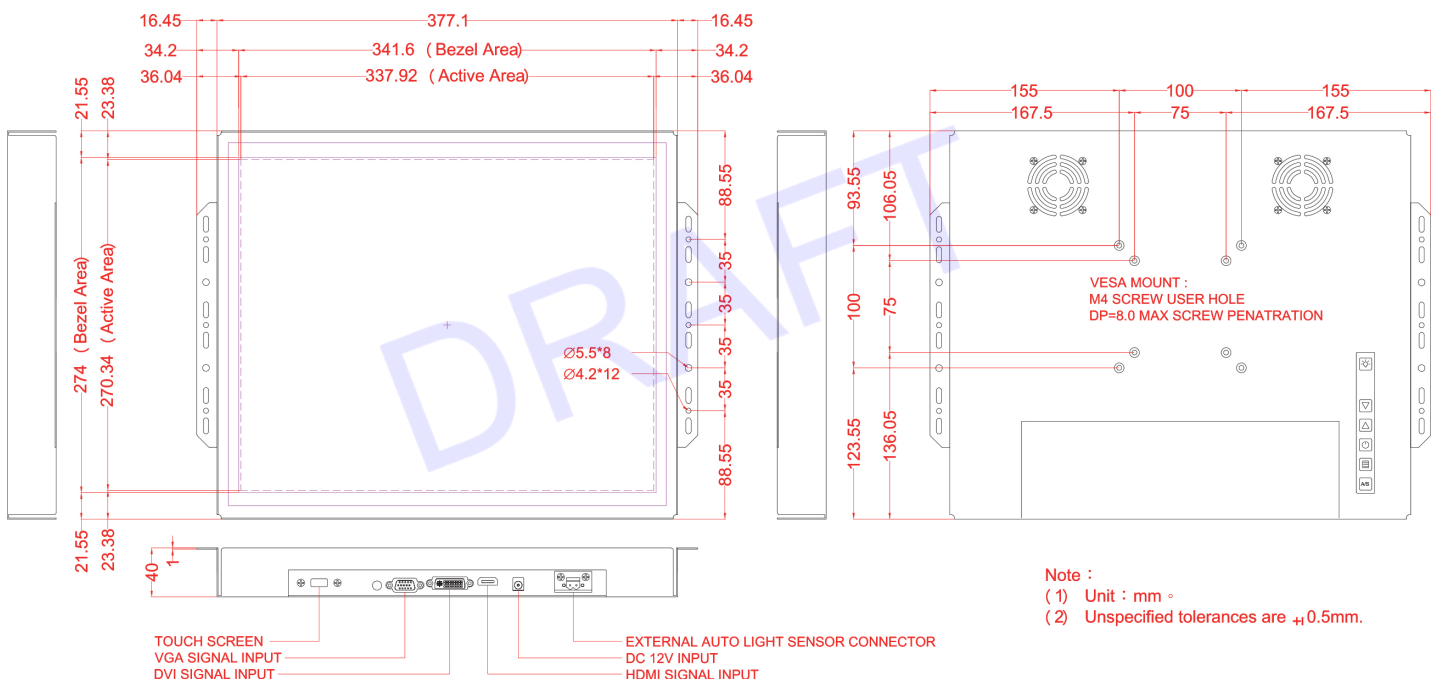

Drawing No.: YOP1700HB2WT-TR-V1-09292022-V1