

SUNLIGHT READABLE OPEN FRAME LCD MONITOR

Open Frame Metal Housing, 4:3, 21.3" LCD Monitor
1600x1200, 1000nits, VGA+DVI+HDMI input, Side OSD



Model: YOP2130HB

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1600*1200.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS:

Panel Type	21.3-inch TFT LCD
Viewable Size Image	21.3-inch
Active Display Area (mm)	432 (H) x 324 (V)
Pixel Pitch (mm)	0.27 x 0.27
Number of Pixels	1600x1200
Contrast Ratio	1800:1
Display Color	16.7M
Brightness (cd/m ²)	10000nits
Viewing Angle(Typ.)	89 / 89 / 89 / 89 (R/L/U/D)
Signal Connector	VGA + DVI-D + HDMI Input
Power Source	DC12V, AC110 ~ 220V, Universal +/- 10%
Power Management	VESA DPMS Compliant
Operating Temperature	0 ~ 50°C
Storage Temperature	-20 ~ 60°C
Plug & Play	VESA DDC 1/2B

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

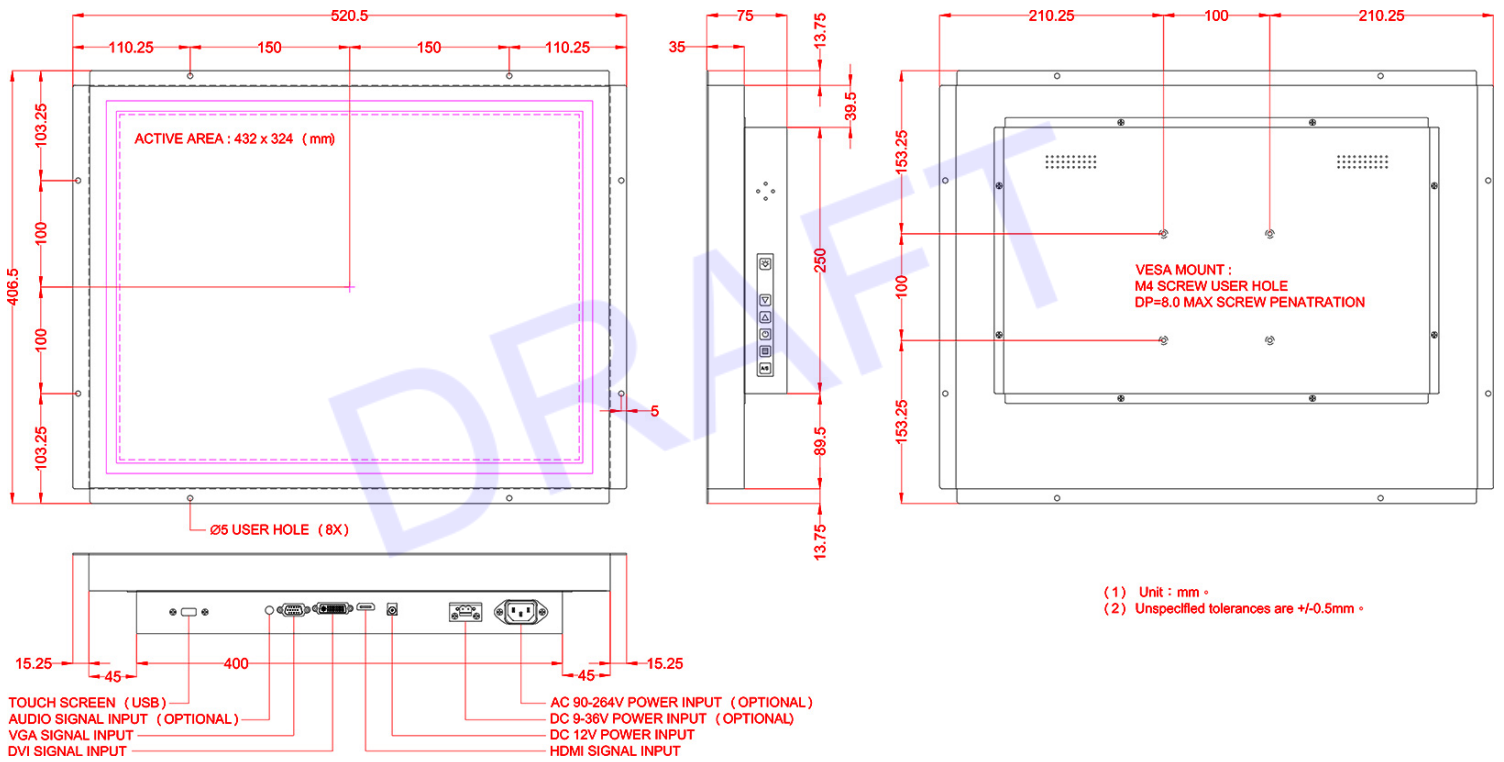

- (1) Unit : mm °
- (2) Unspecified tolerances are +/-0.5mm °

Drawing No.: YOP2130HB-09122023-V1