
SUNLIGHT READABLE OPEN FRAME LCD MONITOR

7" Open Frame / 800x480 / 1000nits LED / VGA+DVI+HDMI Signal Input 4 Wires Resistive Touch screen with USB controller Operating Temp. -20 to 70C

Model: YOPW0700HB-TR



FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 800*480.
- Power management system conforms to VESA
- DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.

SYSTEM SPECIFICATIONS:


Panel Type	7-inch TFT LCD
Screen Diagonal	7-inch
Active Display Area (mm)	152.40 (H) x 91.44 (V)
Pixel Pitch (mm)	0.1905 x 0.1905
Number of Pixels	800 * 480
Contrast Ratio	400:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m²)	1000 cd/m ²
Viewing Angle (Typ.)	65/65/70/70 (R/L/U/D)
Signal Connector	VGA + DVI + HDMI Input
Power Source	AC110 ~ 220V External Adapter
Power Management	VESA DPMS Compliant
Operating Temperature	-20°C ~ 70°C
Plug & Play	VESA DDC 1/2B



i-Tech Company LLC EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

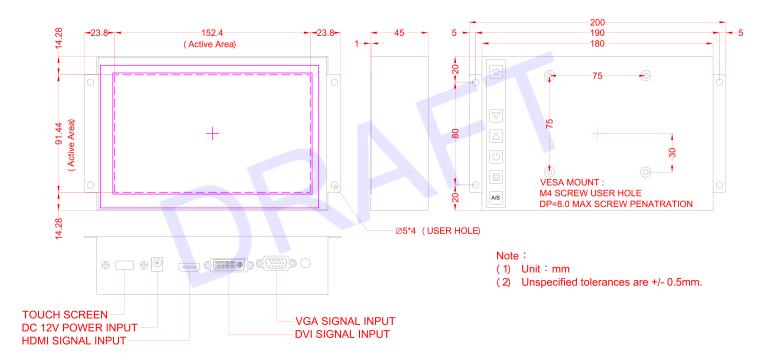

Drawing No.: YOPW0700HB-TR-06082023-V1

i-Tech Company LLC EMAIL: <u>info@itechlcd.com</u> • WEB: <u>www.iTechLCD.com</u>