



## Model: YOPW1560HB-TH

Super Thin 40mm (1.58" Thick) 15.6", 1920x1080, 1000nit, VGA+DVI+HDMI Input, NON-TOUCH, DC 9-36V Power Input, External OSD with Hot key Control Brightness + Loose OSD Membrane Extended 12" Long Cable with "Up" and "Down" to Control Brightness directly.

### FEATURES:

- The TFT-LCD Monitor boasts vibrant colors with support for resolutions up to 1920\*1080.
- Its power management system aligns with VESA DPMS and EPA Energy Star standards.
- Designed with touch screen installation and application in mind for optimal functionality.
- Equipped with a universal power adapter for versatile usage.
- Ensures Plug & Play compatibility through support for DDC1 & DDC2B.
- Enjoy precise picture quality adjustment with the advanced OSD control feature.
- The monitor's robust construction includes a steel frame for durability.


### SPECIFICATIONS:

Panel Type	15.6-inch TFT LCD
Screen Diagonal	15.6-inch
Active Display Area (mm)	344.16(H) x 193.59(V)
Pixel Pitch (mm)	0.17925 x 0.17925
Number of Pixels	1920 x 3(RGB) x 1080
Contrast Ratio	700:1
Display Color	16.2M Colors ( RGB 6-bits +2FRC)
Brightness (cd/m)	1000nits
Viewing Angle(Typ.)	80 / 80 / 70 / 70 ( R/L/U/D)
Signal Connector	VGA+DVI+HDMI
Power Source	DC +12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-10 ~ +70°C
Storage Temperature	-20 ~ +70°C
Plug & Play	VESA DDC 1/2B
Transparency	> 85% (typ.)
Hardness of surface	7H
Linearity	±1.5%(max.)
<b>Other option:</b>	
DC 9-36V Wide Voltage Input	

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

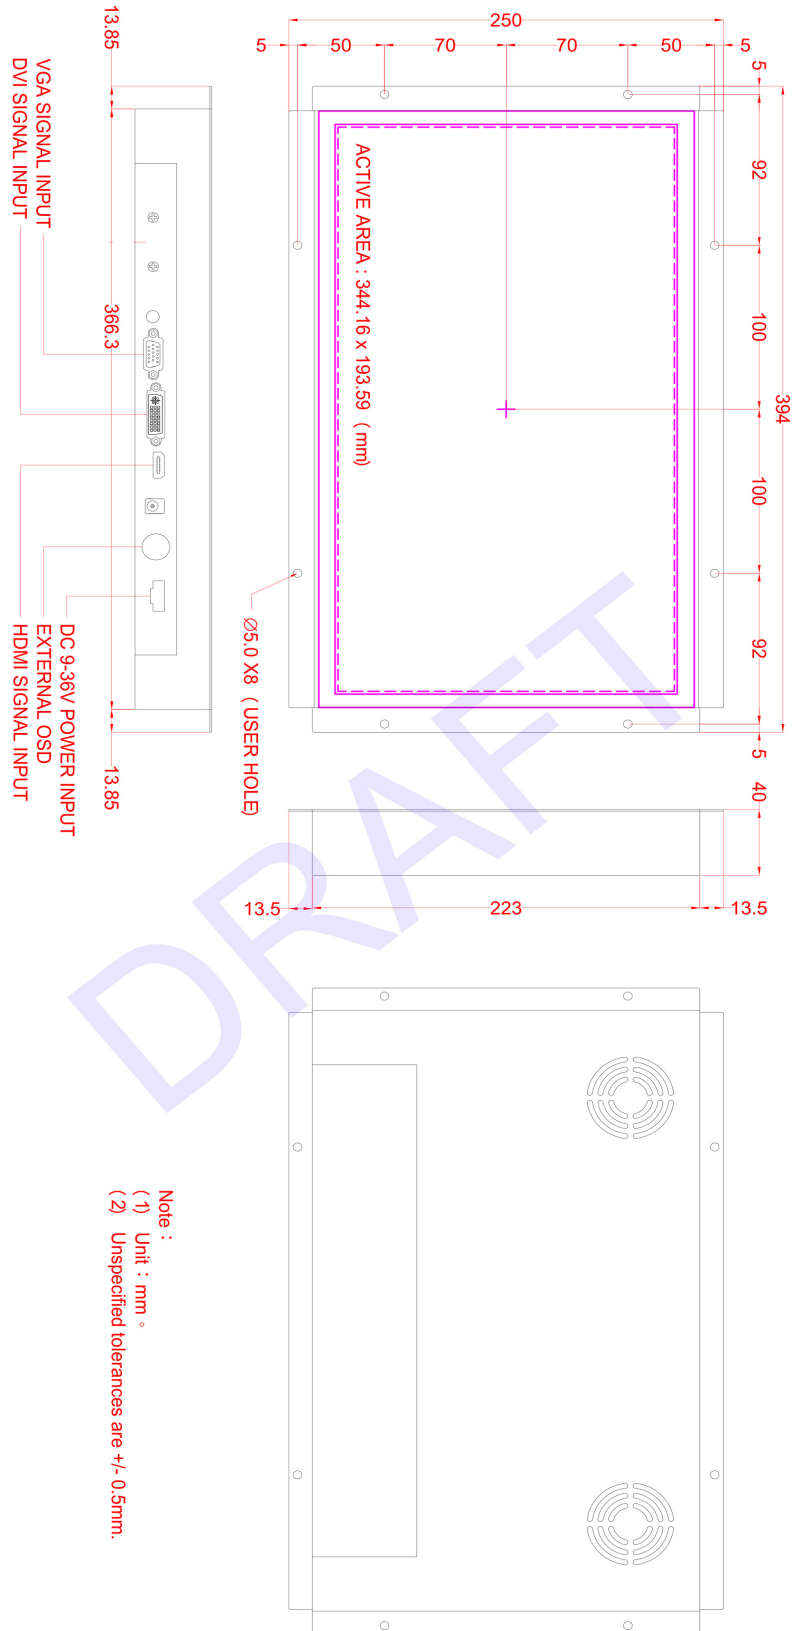

Note :  
(1) Unit : mm .  
(2) Unspecified tolerances are +/- 0.5mm.

Drawing No.: YOPW1560HB-TH-12272023