

# SUNLIGHT READABLE OPEN FRAME HIGH BRIGHTNESS LCD

24" Open Frame / 1920x1200 / 850nits-LED / VGA + DVI-D + HDMI Signal Input

Side OSD / AC 90~264V Power Input

Note (1) : We don't have DVI-I signal input, just DVI-D.

Note (2) : We don't have RS232 Debug Port.



## Model: YOPW2400PHBV2

### FEATURES:


- Color TFT-LCD Monitor with high contrast, supporting resolutions up to 1920\*1200.
- Power management system compliant with VESA DPMS and EPA Energy Star standards.
- Equipped with a Universal Power Adapter for convenience.
- Plug & Play compatibility through support for DDC1 & DDC2B.
- Advanced OSD control available for precise picture quality adjustment.
- Detachable stand allows for wall-mounting adjustment.
- Sturdy monitor featuring a steel frame for durability.
- Custom design options available upon request.

### SPECIFICATIONS:

ITEM	SPECIFICATION
Panel Type	24.0-inch TFT LCD
Screen Diagonal	24.0-inch
Active Display Area (mm)	518.4 (H) x 324.0 (V)
Pixel Pitch (um)	0.270 (per one triad) x 0.270
Number of Pixels	1920 (x3) x 1200
Contrast Ratio	1000:1
Color Arrangement	1.07B colors (10-bit)
Brightness (cd/m <sup>2</sup> )	850 cd/m <sup>2</sup>
Viewing Angle(Typ.)	89 / 89 / 89 / 89 ( R/L/U/D)
Signal Connector	15 PIN D-Sub,DVI-D,HDMI
Power Source	AC 90~264V Power Input
Power Management	VESA DPMS Compliant
Operating Temperature	0 ~ 50°C
Storage Temperature	-20 ~ 60°C
Plug & Play	VESA DDC 1/2B

\*Specifications subject to change without notice, not responsible for typographical errors.

### MECHANICAL DRAWINGS:

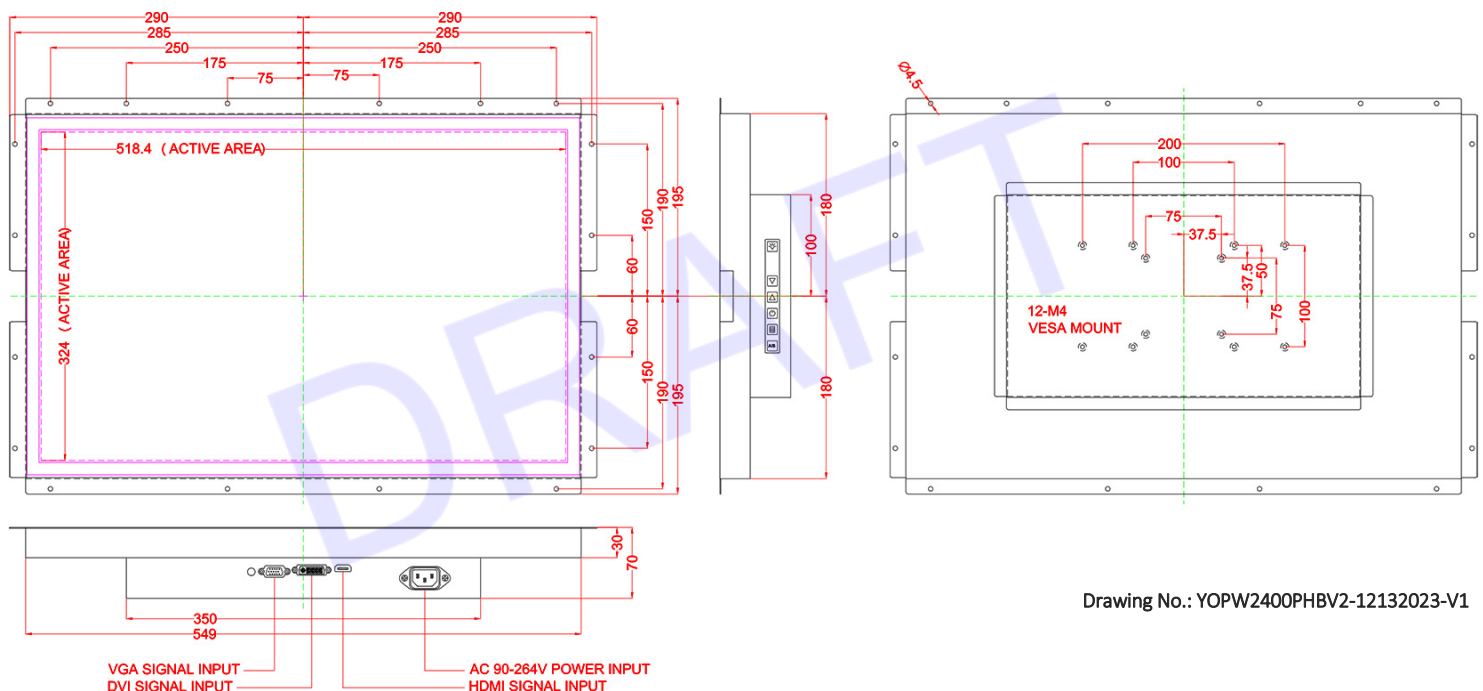

Drawing No.: YOPW2400PHBV2-12132023-V1