

IP65 SUNLIGHT READABLE PANEL MOUNT LCD MONITOR

21.5" Panel Mount / 6mm Aluminum front bezel / Front IP65 / 1920x1080 / 1500nits-LED / 89,89,89,89 / 1000:1 / VGA+DVI+HDMI signal input / PCAP Touch (AG Coating) with USB controller / VESA Mount / AC 90~264V Power Input / Operating Temp. : 0 to 50C (High Tni 110C)



Model: YPMW2150-PCAP-V2

FEATURES:

- Sunlight Readable.
- Color Active Matrix Liquid Crystal Display.
- FULL HD (1920 x 1080)
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


SPECIFICATIONS:

Item	Specification
Panel Type	21.5-inch TFT LCD
Screen Diagonal	21.5-inch
Active Display Area (mm)	476.64 (H) x 268.11 (V)
Pixel Pitch (um)	248.25 x 248.25
Number of Pixels	1920 x 1080
Contrast Ratio	5000: 1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m ²)	1500 cd/m ²
Viewing Angle (Typ.)	178/178 (H/V)
Signal Connector	VGA+DVI+HDMI
Power Source	AC 90~264V Power Input
Power Management	VESA DPMS Compliant
Operating Temperature	0 ~ 50°C
Storage Temperature	-20 ~ 60°C

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

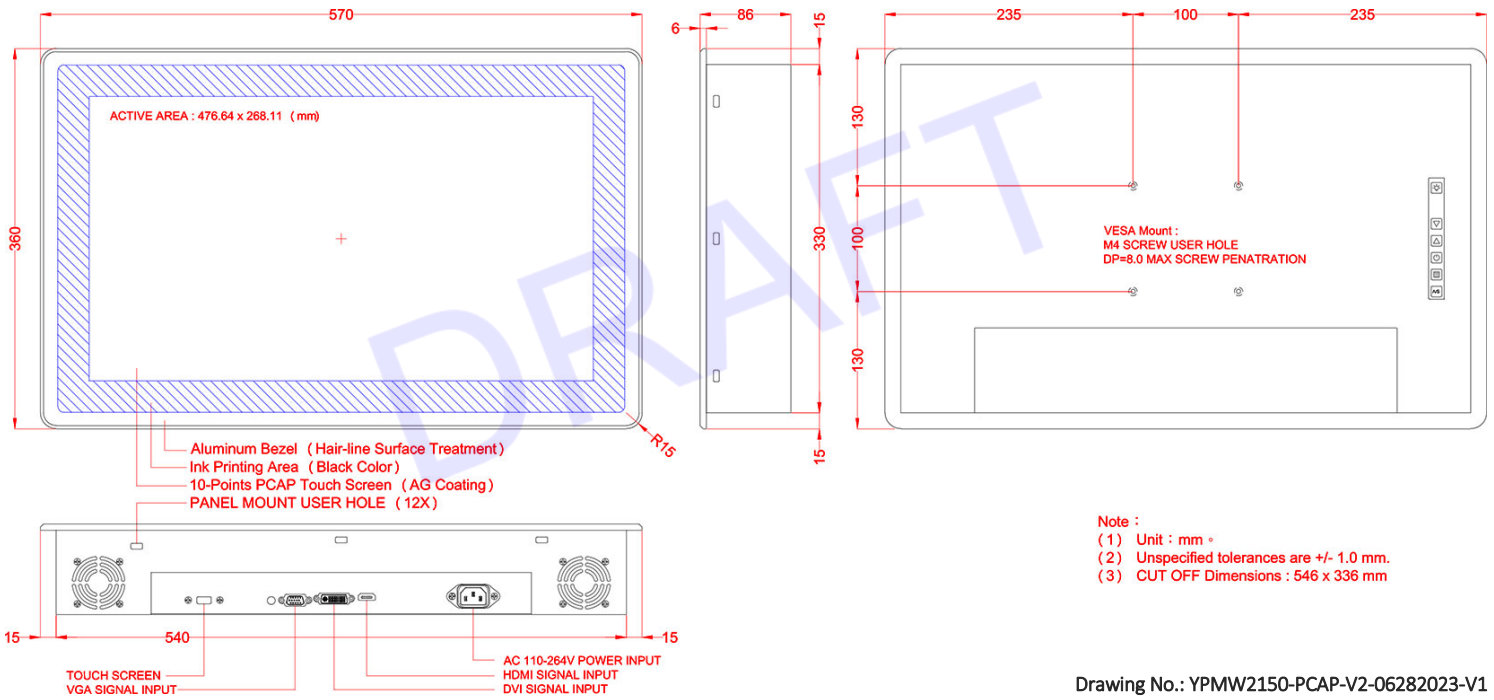

Drawing No.: YPMW2150-PCAP-V2-06282023-V1