


SUNLIGHT READABLE HIGH BRIGHTNESS

INDUSTRIAL IP65 FRONT ALUMINUM FRONT PANEL MOUNT METAL HOUSING

21.5" LCD 1920x 1080 1000nits 5000:1 with VGA+DVI+HDMI input (with Speakers), Power Consumption 30 Watts, Rear OSD, including Clamp/VESA Mount. Integrated 21.5"- 5 Wires Resistive Touch with USB Controller, Wide input range: 9-36 VDC Terminal Block "+" and "-".



Model: YPMW2150HB-JC1

FEATURES:

- Industrial Aluminum Front Panel Mount Metal Housing
- IP65 Front
- Sunlight Readable High Brightness
- Integrated 21.5"- 5 Wires Resistive Touch with USB Controller
- Wide input range: 9-36 VDC Terminal Block "+" and "-".


SPECIFICATIONS:

ITEM	SPECIFICATION
Panel Type	21.5-inch TFT LCD
Screen Diagonal	21.5-inch
Active Display Area (mm)	476.64 (H) x 268.11 (V)
Pixel Pitch (um)	248.25 x 248.25
Number of Pixels	1920 x 1080
Contrast Ratio	5000: 1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m ²)	1000 cd/m ²
Viewing Angle (Typ.)	178/178 (H/V)
Signal Connector	VGA+DVI+HDMI
Power Source	9-36 VDC Terminal Block "+" and "-".
Power Management	VESA DPMS Compliant
Operating Temperature	0 ~ 50°C
Storage Temperature	-20 ~ 60°C

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

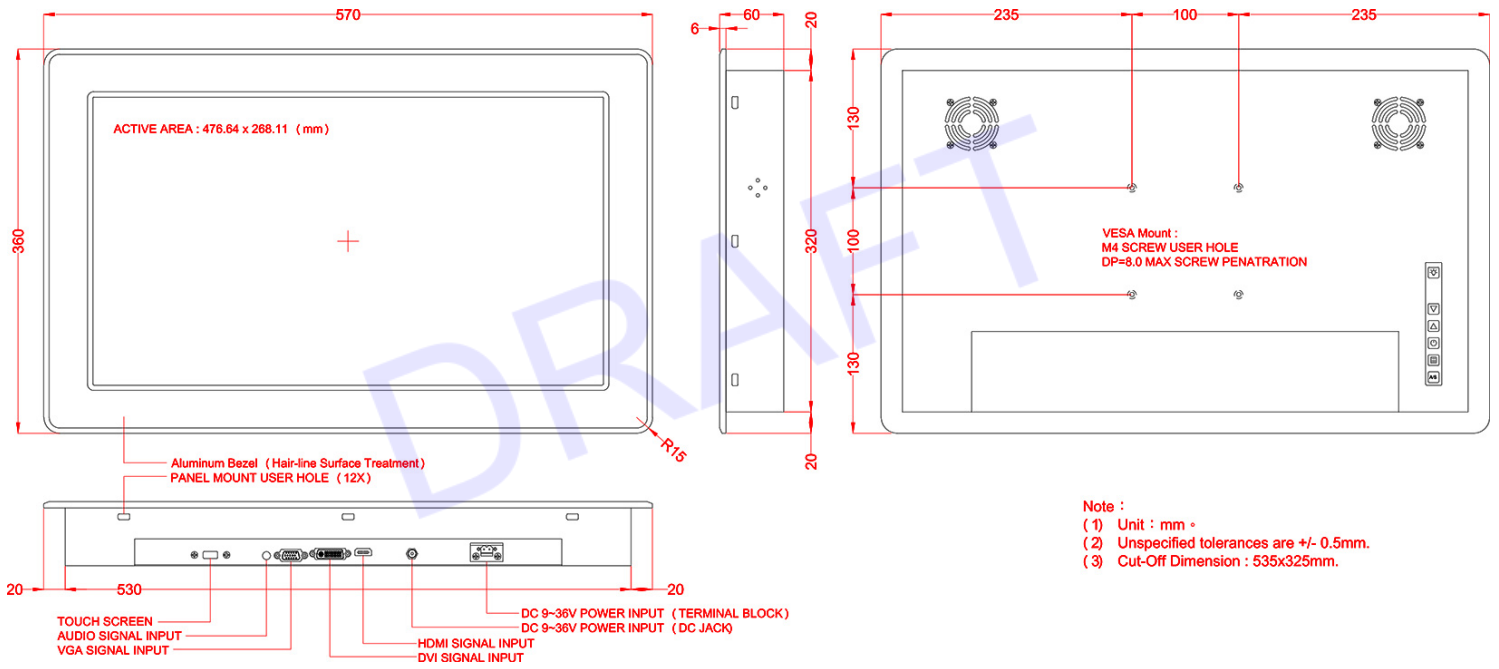

- Note :
- (1) Unit : mm °
 - (2) Unspecified tolerances are +/- 0.5mm.
 - (3) Cut-Off Dimension : 535x325mm.

Drawing No.: YPMW2150HB2-JC1-01312024-V1