

# SUNLIGHT READABLE HIGH BRIGHTNESS

## IP65 Front Panel Mount (Metal-5mm)

High Brightness Wide 21.5" LCD 1920\*1080 1000nits, LCD Surface Temp up to 110C 5000:1, 89/89/89/89, Power Consumption 61.8W with VGA and DVI input. Operating temp is -10C -80C, Operating Humidity 10-90%

Integrated 21.5"- 5 Wires Resistive Touch with USB Controller



## Model: YPMW2150WTHB-TR

### FEATURES:

- Sunlight Readable.
- Color Active Matrix Liquid Crystal Display.
- FULL HD (1920 x 1080)
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


### SPECIFICATIONS:

Item	Specification
Panel Type	21.5-inch TFT LCD
Screen Diagonal	21.5-inch
Active Display Area (mm)	476.64 (H) x 268.11 (V)
Pixel Pitch (um)	248.25 x 248.25
Number of Pixels	1920 x 1080
Contrast Ratio	5000: 1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m <sup>2</sup> )	1500 cd/m <sup>2</sup>
Viewing Angle(Typ.)	178/178 (H/V)
Signal Connector	VGA+DVI
Power Source	AC100 ~ 240V, Universal +/- 10%
Power Consumption	61.8W Typical, normal operation
Power Management	VESA DPMS Compliant
Operating Temperature	-10 ~ 80°C
Storage Temperature	-20 ~ 60°C

*\*Specifications subject to change without notice, not responsible for typographical errors.*

## MECHANICAL DRAWINGS:

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*

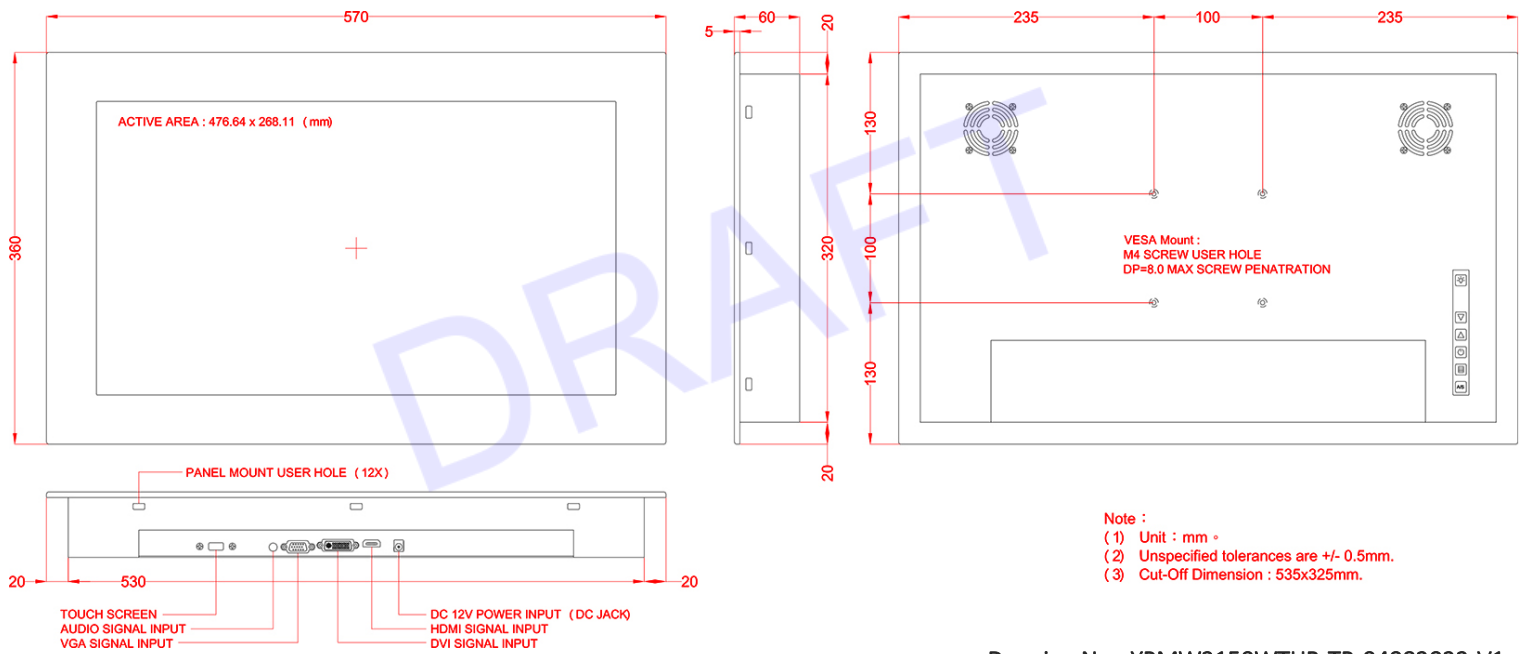

Drawing No.: YPMW2150WTHB-TR-04082022-V1