


SUNLIGHT READABLE HIGH BRIGHTNESS

IP65 Front Panel Mount (Metal-5mm)

High Brightness Wide 21.5" LCD 1920*1080 1500nits, LCD Surface Temp up to 110C 1000:1, 89/89/89/89, Power Consumption 48W with VGA, DVI and HDMI input. Operating temp is -0C-50C, Operating Humidity 10-90%

Integrated 21.5"- 5 Wires Resistive Touch with USB Controller



Model: YPMW2150WTHB2-TR

FEATURES:

- Sunlight Readable.
- Color Active Matrix Liquid Crystal Display.
- FULL HD (1920 x 1080)
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


SPECIFICATIONS:

| Item | Specification |
|---------------------------------|---------------------------------|
| Panel Type | 21.5-inch TFT LCD |
| Screen Diagonal | 21.5-inch |
| Active Display Area (mm) | 476.64 (H) x 268.11 (V) |
| Pixel Pitch (um) | 248.25 x 248.25 |
| Number of Pixels | 1920 x 1080 |
| Contrast Ratio | 1000: 1 |
| Color Arrangement | R.G.B. Vertical Stripe |
| Brightness (cd/m ²) | 1500 cd/m ² |
| Viewing Angle (Typ.) | 178/178 (H/V) |
| Signal Connector | VGA+DVI+HDMI |
| Power Source | AC100 ~ 240V, Universal +/- 10% |
| Power Consumption | 48 watts (Max.) |
| Power Management | VESA DPMS Compliant |
| Operating Temperature | -0 ~ 50°C |
| Storage Temperature | -20 ~ 60°C |

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

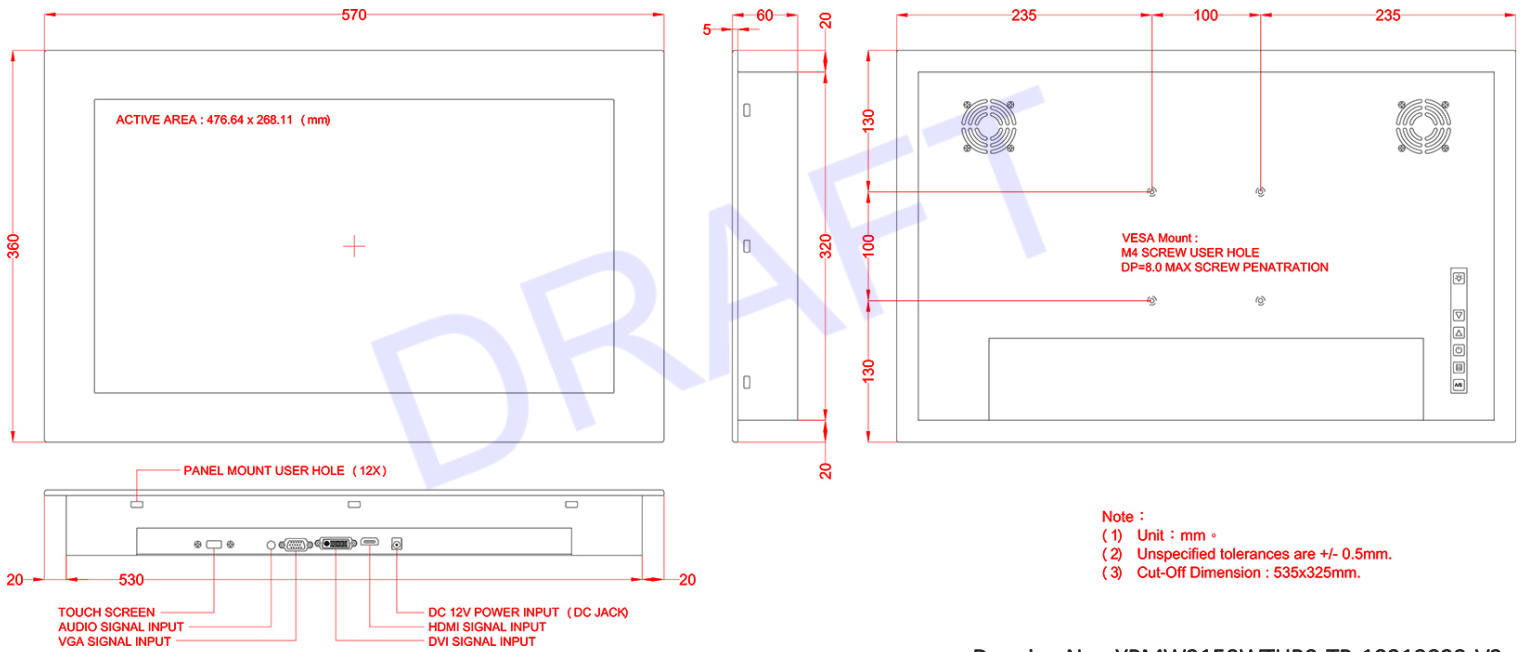

Drawing No.: YPMW2150WTHB2-TR-10312022-V2