


SUNLIGHT READABLE 7U RACKMOUNT LCD (2mm Metal Front Bezel)

15"-1024x768, LED-1500nits, Wide Temp (-30~85 Degree) ,
Operating and Storage - 30C to 85C, Viewing angle H 80/80
V70/80, Optical Bonding VGA+DVI+HDMI input ports Front OSD
Brightness Control and w/o Handle, VESA Mounting & Built in Power
Supply with 5 Wire Resistive Touch Screen and USB Controller

MODEL: YRM1500HB2WT-TR

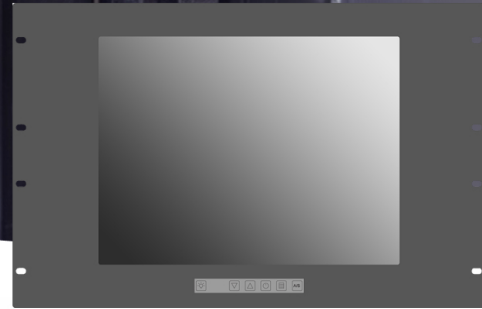

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1024*768.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATION:

ITEM	SPECIFICATION
Panel Type	15.0-inch TFT LCD
Screen Diagonal	15.0-inch
Active Display Area (mm)	304.128(H) × 228.096(V)
Pixel Pitch (mm)	0.297(per one triad) × 0.297
Number of Pixels	1024 × 3(RGB) × 768
Contrast Ratio	800:1
Display Color	262K / 16.2M Colors
Brightness (cd/m)	1500 cd/m (Without Touch Screen)
Viewing Angle(Typ.)	80 / 80 / 70 / 80 (R/L/U/D)
Signal Connector	15 PIN D-Sub,DVI-D,HDMI
Power Source	AC 100~240V,Universal(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ +85 °C
Storage Temperature	-30 ~ +85 °C
Plug & Play	VESA DDC 1/2B
Touch Type	5-Wire Resistive Touch Screen (USB Type AInterface)
Transparency	> 80% (typ.)
Hardness of surface	3H
Linearity	±1.5%(max.)
Speaker	2 Watts x 2
Optical Bonding	

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

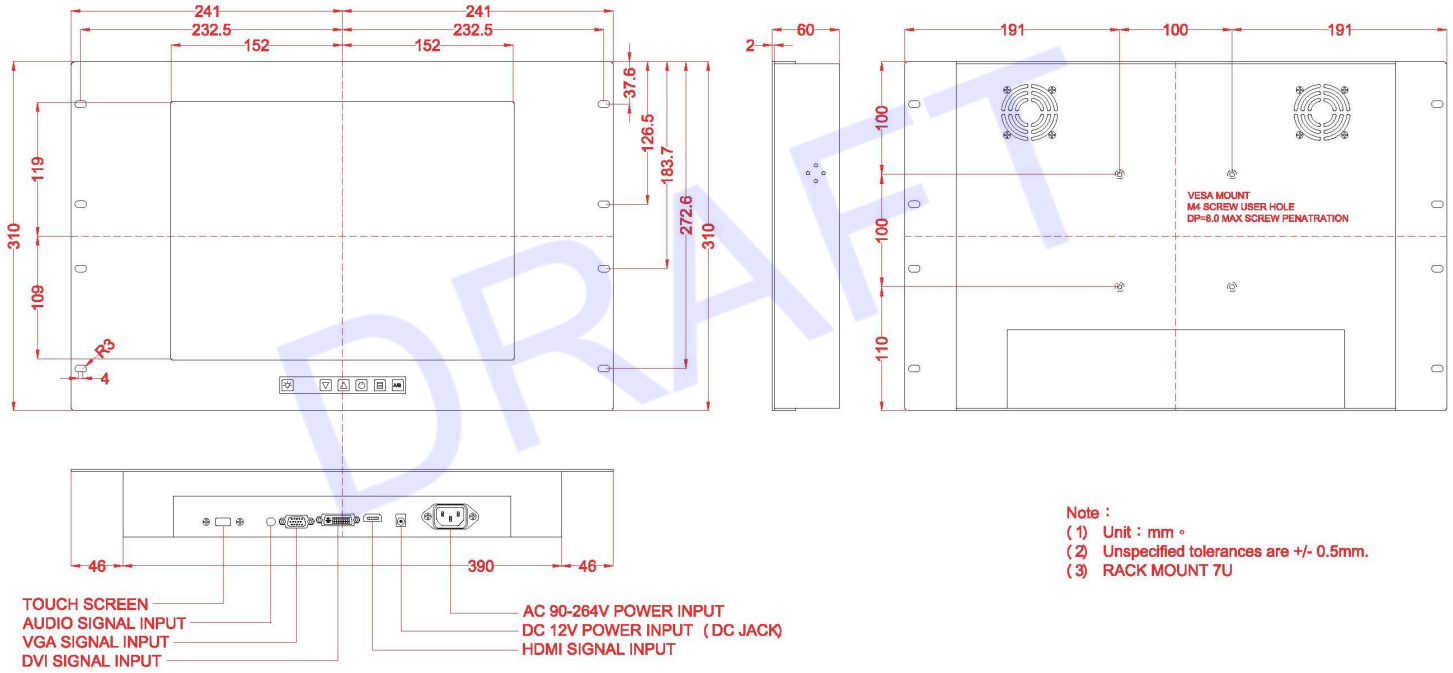

Note :

- (1) Unit : mm -
- (2) Unspecified tolerances are +/- 0.5mm.
- (3) RACK MOUNT 7U

Drawing No.: YRM1500HB2WT-TR-07312023-V1