

# Sunlight Readable LED LCD Kits


15" Sunlight Readable LED  
LCD kits

Model: JPD1500-KIT-B



## Features

- Sunlight Readable
- High Contrast Ratio
- Wide Temperature
- Low Power Consumption
- Optional Touch Systems
- VGA to XGA

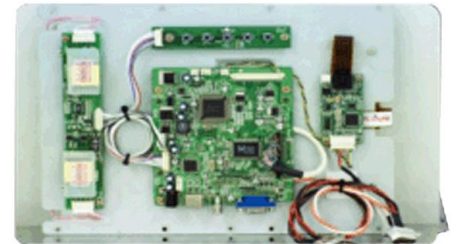

## Specifications:

### PANEL

|                              |   |
|------------------------------|---|
| Display Type                 | LCD + LED Driver + AD/OSD Board                       |
| LCD Display                  | 15" TFT LCD Module                                    |
| Base Panel Supplier          | AUO   |
| Base Panel Model             | G150XG03 V2   |
| Display Color                | 8-bits, 16.2M/262K colors                             |
| Display Area                 | 304.128 x 228.096 mm                                  |
| Brightness                   | 1,500 nits  |
| Resolution                   | 1024 x 768 (XGA)                                      |
| Contrast Ratio               | 700 : 1   |
| Pixel Pitch (mm)             | 0.297 x 0.297   |
| Viewing Angle                | 70°/70°(H) 65°/60°(V)                                 |
| Response Time                | 8ms (Tr+Tf)   |
| Sync                         | LVDS  |
| Power Consumption            | TBD   |
| Temperature                  | Operation 0°C~+65°C<br>Storage -20°C~+65°C            |
| Dimension(WxHxD)mm           | 326.50 x 253.50 x 12.00                               |
| Lamp Lifetime (HR)           | 50,000  |
| Control(AD) Board (Optional) | N/A   |
| OSD Button                   | N/A   |
| OSD Menu                     | Brightness Contrast H/V Position Color Phase Clock... |
| LED Driver                   | JL150   |
| Weight                       | 1,200 g   |
| Optional                     | Transflective tech<br>Glass Bonding<br>Touch          |

Specifications are subject to change without notice

|                              |   |
|------------------------------|---|
| Control(AD) Board (Optional) | Standard VGA + DVI + Audio(Optional)<br>Option VGA + DVI + Composite + S-Video +<br>Audio(Optional) |
| OSD Button                   | 5 Key Power Switch Select(+,-) Down Up Menu   |

