

Rack Mount Flip-down Display Drawer

19" 1280 x 1024 HDMI, Audio input and built in 2 watts speakers Adjust Angle 0-104 Degree Integrated with Resistive Touch screen USB controller + 110/220V AC Power Input.

Model: ANP119UM-TR



FEATURES:

- Flip-down 19 inch rack mountable
- 19 inch 1280 x 1024 resolution
- HDMI, Audio input
- Heavy duty steel chassis construction
- Front osd control buttons to optimized display
- Build in 2x 2watts stereo speakers
- Adjust angle 0°~104°

OPTION:

- Composite video input
- DVI-D, VGA or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass

SPECIFICATIONS

LCD CHARACTERISTICS	
Screen Size	19"
Backlight Type	LED
Resolution	1280*1024
Contrast Ratio	1000:1
Brightness (cd/m2)	350
View Angles (H/V)	170/160
Pixel Size (HxV) mm	0.294x0.294
Max. Color	16.7M
MTBF (Hrs.)	50,000

INPUT SIGNALS	
HDMI	x1
Audio	3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB (option)	USB A Type connector
Touch-RS232 (option)	D-SUB 9P connector (Female)

POWER SPECIFICATIONS	
AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input
Wide Range DC Power Input (option)	Screw Type Terminal Block with internal wide Range DC 9-36V power module


USER CONTROL INTERFACE	
Power ON / OFF via Front Button	
Power Mode Status LED indicator	
OSD (On Screen Display) Buttons	

MECHANICAL AND ENVIRONMENT	
Height	1U Foldable
Rack Depth	20" to 36" (cabinet front rail to rear trail)
Mounting	Rack Mount with tilt adjustment
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	448*44*508 (mm)
Packing Dimension (WxHxD)	790*190*580 (mm)
Net Weight / Gross Weight	17.5 / 21 (KGs)
Certification and Approvals	CE / FCC / RoHs

**Specifications subject to change without notice, not responsible for typographical errors.*

DRAWINGS

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

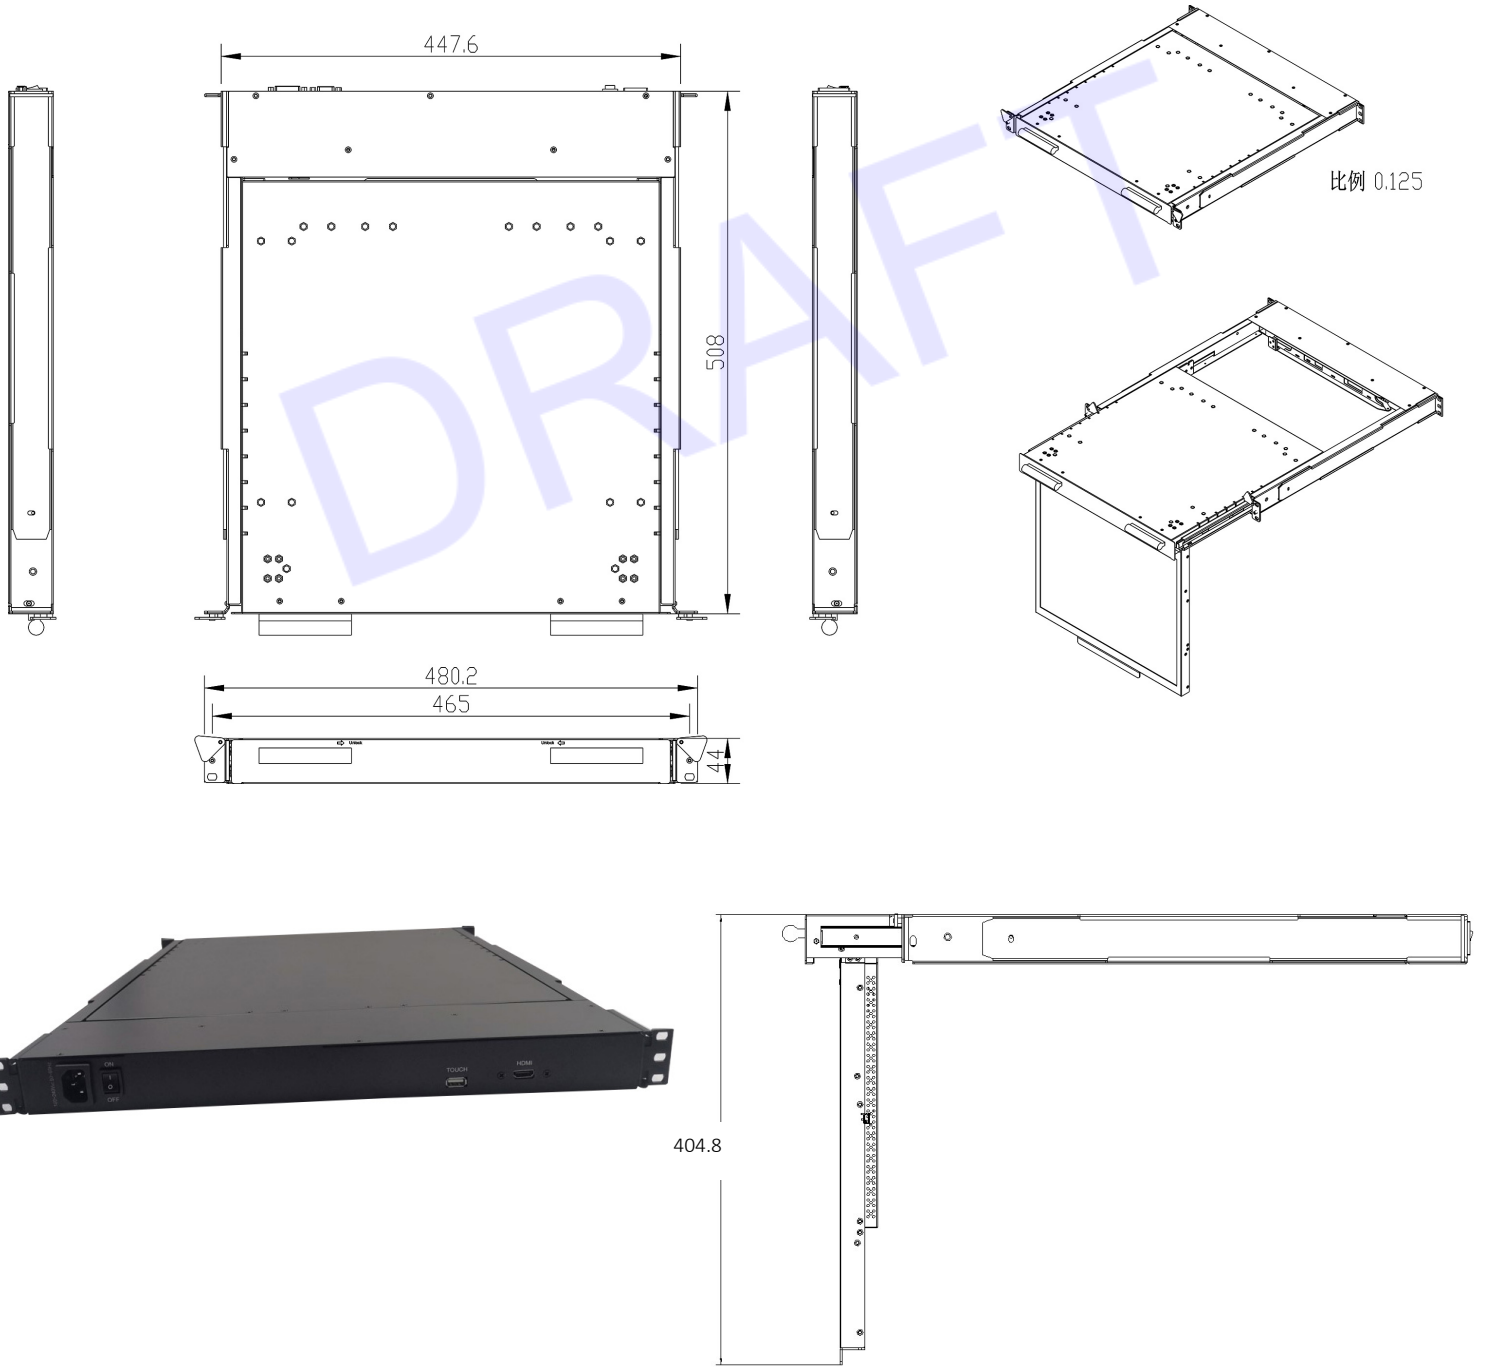

Drawing no.: ANP119UM-TR-11282022-V1