

Sunlight Readable LED LCD Kits


26" Wide Sunlight Readable LED
LCD Kits

Model: JPDW2600-KIT



Features

- Sunlight Readable
- High Contrast Ratio
- Wide Temperature
- Low Power Consumption
- Optional Touch Systems
- VGA to WXGA

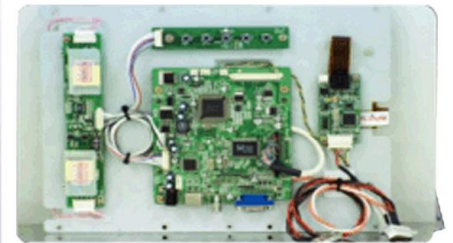

Specifications:

PANEL

Display Type	LCD + LED Driver + AD/OSD Board
LCD Display	26.0" TFT LCD Module
Base Panel Supplier	AUO
Base Panel Model	T260XW02 VR
Display Color	8-bits, 16.7M colors
Display Area	575.769 x 323.712 mm
Brightness	1,500 nits
Resolution	1366 x 768 (WXGA)
Contrast Ratio	3000 : 1
Pixel Pitch (mm)	0.4215 x 0.4215
Viewing Angle	89°/89°(H) 89°/89°(V)
Response Time	6.5ms (GTG)
Sync	LVDS
Power Consumption	TBD
Temperature	Operation 0°C~+50°C Storage -20°C~+60°C
Dimension(WxHxD)mm	626.00 x 373.00 x 45.00
Lamp Lifetime (HR)	50,000
Control(AD) Board (Optional)	N/A
OSD Button	5 Key
OSD Menu	Brightness Contrast H/V Position Color Phase Clock...
LED Driver	JL260
Weight	3,850 g
Optional	Transflective tech Glass Bonding Touch

Specifications are subject to change without notice

Control(AD) Board (Optional)	Standard VGA + DVI + Audio(Optional) Option VGA + DVI + Composite + S-Video + Audio(Optional)
OSD Button	5 Key Power Switch Select(+,-) Down Up Menu

