

Fanless Front Stainless PANEL PC

8.4" / 10.4 Intel852 Fanless Panel PC
Built-in Intel ULV-1GHz CPU
Most Reliable 3.5" Industrial EBC



Model: **PNPC0840U / PNPC1000U**

FEATURES:


Built-in Speaker



IP-54
Water Splash Compliant



VESA-Mounting



True Fanless ATOM Panel PC: Fanless, lower power consumption all in on PC with stainless steel Front bezel.

Stainless Steel Front Bezel:

Reduced dirt adhesion for easier cleaning and maintenance


Built in Speakers at the side

IP65/NEMA4:

Front Water and dust proof. Totally protected against dust, Protected against low pressure jets if water from all directions, limited ingress permitted

5 Wire Resistive Touch:

long life. Its durability and reliability are the features which make it enable to incorporate in heavy industry machinery, commercial markets and electronic equipment

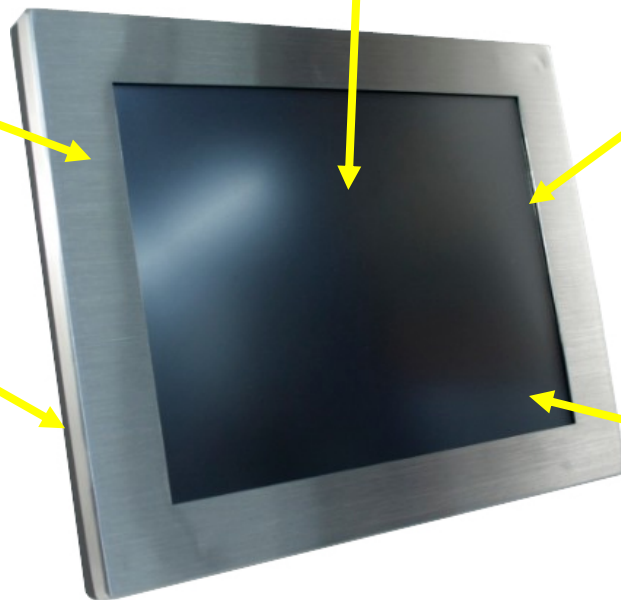

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com



Windows
Embedded
POSReady 2009



Microsoft
Windows
XP
Professional
for Embedded Systems

Side Easy Access I/O:

COM3

Side ON/OFF.

LED Light



Easy Install HDD Tray:
One screw away to remove the HDD easy for access and service

VESA mounting at the back




SPECIFICATIONS:

System	PNPC0840U	PNPC1000U
Motherboard Type	Intel	
Form Factor	3.5" EBC	
System Chipset	Intel 852GM+ICH4	
CPU Supporting	Intel ULV 1GHz (non L2 Cache)	
FSB	400MHz	
DIMM Socket	One 200-PIN SO-DIMM DDR266 up to 1GB: Default 512MB	
Graphic	Integrated Intel 852GM GMCH	
Audio	VIA VT1618AC97 Codec	
LAN Controller	107100/1000 Mbps, VIA VT6122 LAN, support PXE	
I/O Connector	RJ-45x1	
	Serial port x 3	Serial port x 2
	USB port x 2	USB port x 4
	VGA port x 1	
	PS/2 Mini DIN Keyboard port & mouse port	
	Audio Line-in/out and Mic-in Jacks	


Display	PNPC0840U	PNPC1000U
Size	8.4" TFT LCD	10.4" TFT LCD
Contrast Ratio	150:1	220:1
Brightness	250cd/m2	250cd/m2
Resolution	800 x 600	800 x 600

Mechanical	PNPC0840U	PNPC1000U
Touch	Default Taiwan 5wire resistive touch or ELO by option	
Device	2.5" IDE HDD* 1 (Support Ultra DMA-66/100) default 40GB	
Power Supply	60W ATX power adapter	
Bezel	Plastic black color front bezel	
Dimension	220x192x56mm	276x2185x56mm
Optional Ordering	1-3 track MSR WiFi (Mmi-PCI) wrth Antenna	

Wall Mount Plate Kit:

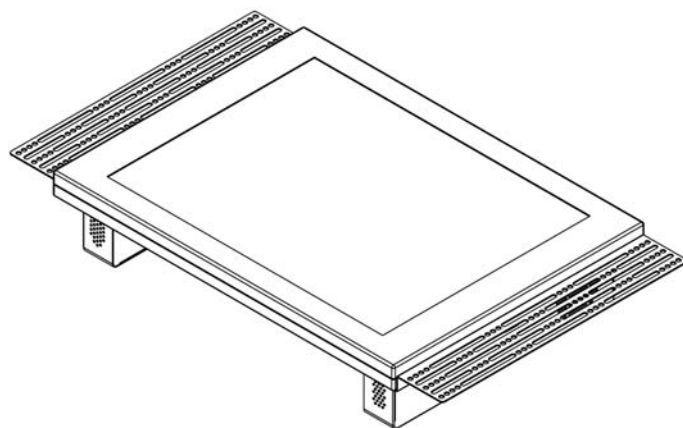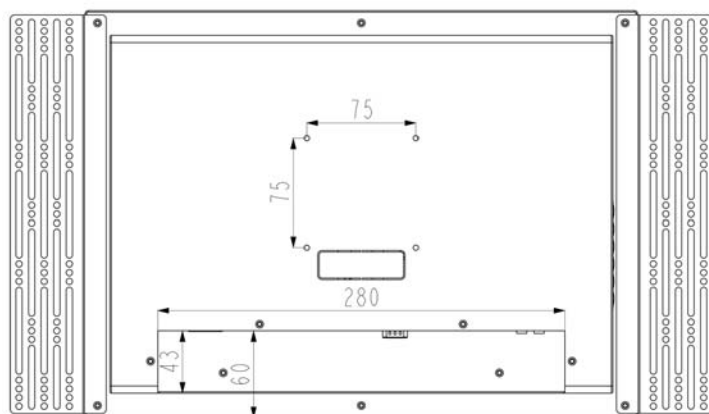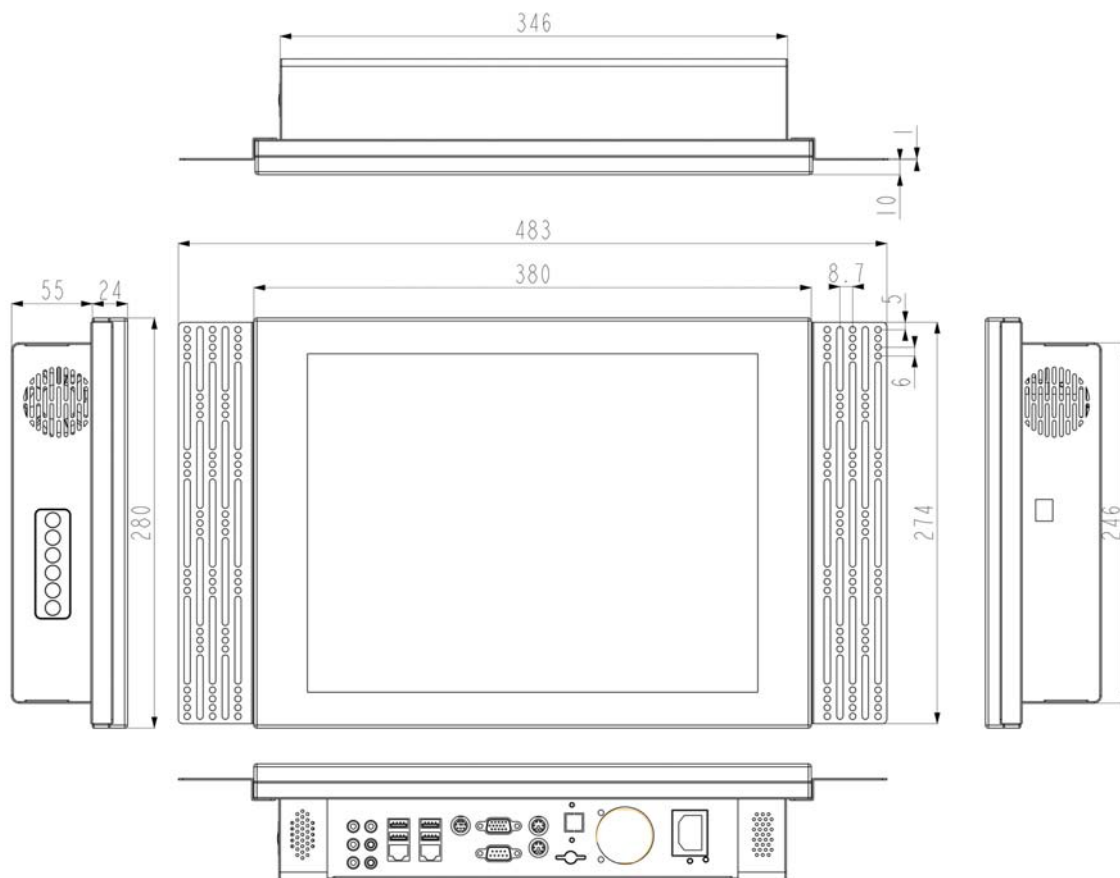

8.4" Mechanical Drawings

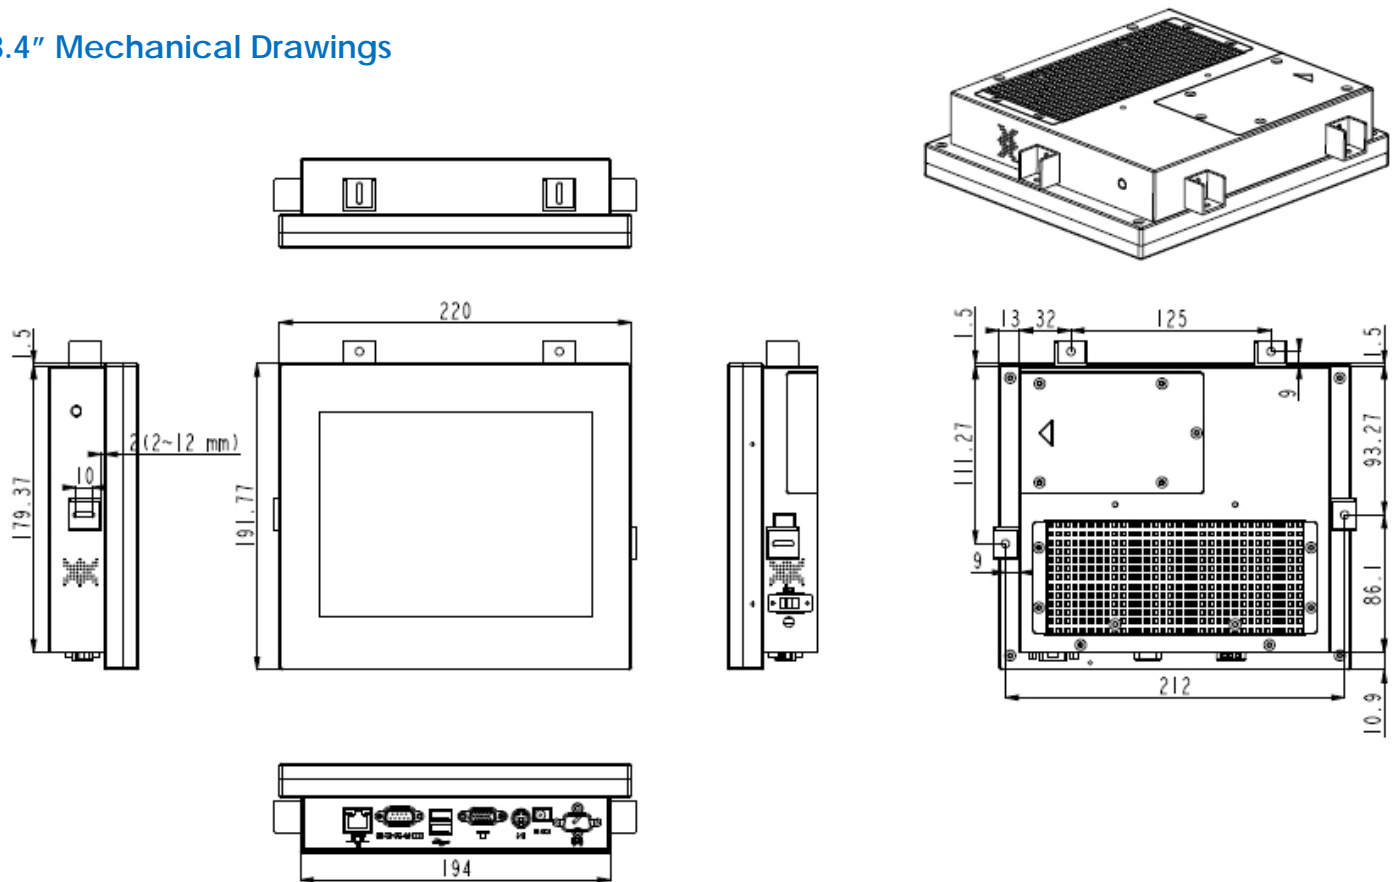

10.4" Mechanical Drawings

