

FULL IP66 FANLESS STAINLESS STEEL PANEL PC



15" Apollo Lake SoC Mobile Processor Fanless Stainless Steel Chassis Touch Panel PC with Full IP-66 & IP-69K

Model: VPC1500SIP-J



FEATURES

- Intel Apollo Lake SoC with Integrated Chipset
- Projective Capacitive Touchscreen Full Flat Design
- Waterproof Power Button
- Rich and swappable I/O, 1 x LAN, 2 x USB, 1 x COM by M12 8-pin(male) with waterproof cover and chain
- IP66 Air pressure relief valve
- Metal Waterproof Connectors
- Wide Range DC in +12V ~ +24V
- Wide Temperature -10°C ~ 50°C
- Full System IP66, IP69K
- Multiple OS support (Win10, Linux, Android)
- Optional WiFi/BT with waterproof antenna
- Optional Auto Dimming/ High Brightness Solution

SPECIFICATIONS

System Information	
Processor	Intel® Celeron® Processor J3455
Platform Controller Hub	Intel Apollo Lake SoC integrated
System Memory	2 x 204-pin DDR3L 1600MTs SO-DIMM up to 16 GB
I/O Chipset	EC ITE IT8528E
Watchdog Timer	H/W Reset, 1sec. ~ 65535sec./1sec.step
H/W Status Monitor	Monitoring SYSTEM Temperature and Voltage with Auto Throttling Control
TPM	Option for Infineon SLB9665 TPM 2.0
SBC	EMX-APLP
Expansion	
Expansion	1 x M.2 (2230) A-Key support WiFi module
Storage	
Storage	Default with 64GB mSATA
Other Storage Device	1 x 2.5" Drive Bay for SSD/HDD(by option)
Panel	
LCD Size	15", 4:3
Display Type	XGA
Resolution	1024x768
Pixel pitch	0.297mm(H) x 0.297mm(V)
Luminance	300 cd/m ²
Contrast ratio	2000
Viewing angle	88 (U), 88 (D), 88(L), 88 (R)
Response time	16ms
Backlight	LED
Touch Type	Projective Capacitive
Touch Light Transmission	85%
Touch Controller	ILITEK COF Touch




I/O	
USB Port	2 x M12 8-pin (male) for 2 x USB 2.0 with waterproof cover and chain
COM Port	1 x M12 8-pin (male) COM(RS-232/422/485) with waterproof cover and chain
SATA	1 x SATA III
Other	1 x WiFi with waterproof antenna (Optional)
Display	
Graphic Chipset	Intel® HD Graphics 500
Spec. & Resolution	LVDS: Max. resolution 1920x1080 @ 60Hz eDP: Max. resolution 4096x2160 @ 60Hz
Audio	
Audio Codec	Realtek ALC662 supports 2-CH
Certifications	
Certification Information	CE, FCC Class A
Ethernet	
LAN Chipset	2 x Intel I211AT Gigabit Ethernet
Ethernet Interface	10/100/1000 Base-Tx GbE compatible
LAN Port	1 x M12 8-pin (male) for LAN with waterproof cover and chain
Power Requirement	
DC Input	+12V ~ +24V
DC Input Connector	1 x M12 3-pin (male) for DC power with waterproof cover and chain
Adapter	Input: 100 ~ 240Vac/ 50 ~ 60Hz Output: 60W Adapter (24V @ 2.5A Adapter) AC-DC Adapter (Need waterproof M12/3Pin- D2.5DCJack-Plug 200cm cable for M12 DC in connector)
Mechanical & Environmental	
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F), by flow = 0.5
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Weight	5.7 Kgs
Vibration Test	With SSD/mSATA : 1.5Grms, IEC 60068-2-64, Random, 5 ~ 500Hz, 30min/axis
Shock Test	With CF/SSD : 10Grms, IEC 60068-2-27, Half Sine, 11ms
IP Rating	Whole System IP69K, IP66
Mounting Kit	Wall / Stand / VESA 75mm x 75mm, 100mm x 100mm
Power Mode	AT/ATX (ATX is default setting)
System Fan	Fanless
Construction - Front	Silver Stainless
Construction - Rear	Silver Stainless
Dimension	393 x 315.8 x 49 mm
Software Support	
OS Information	Win10 Linux Android x86 8.1

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWING

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

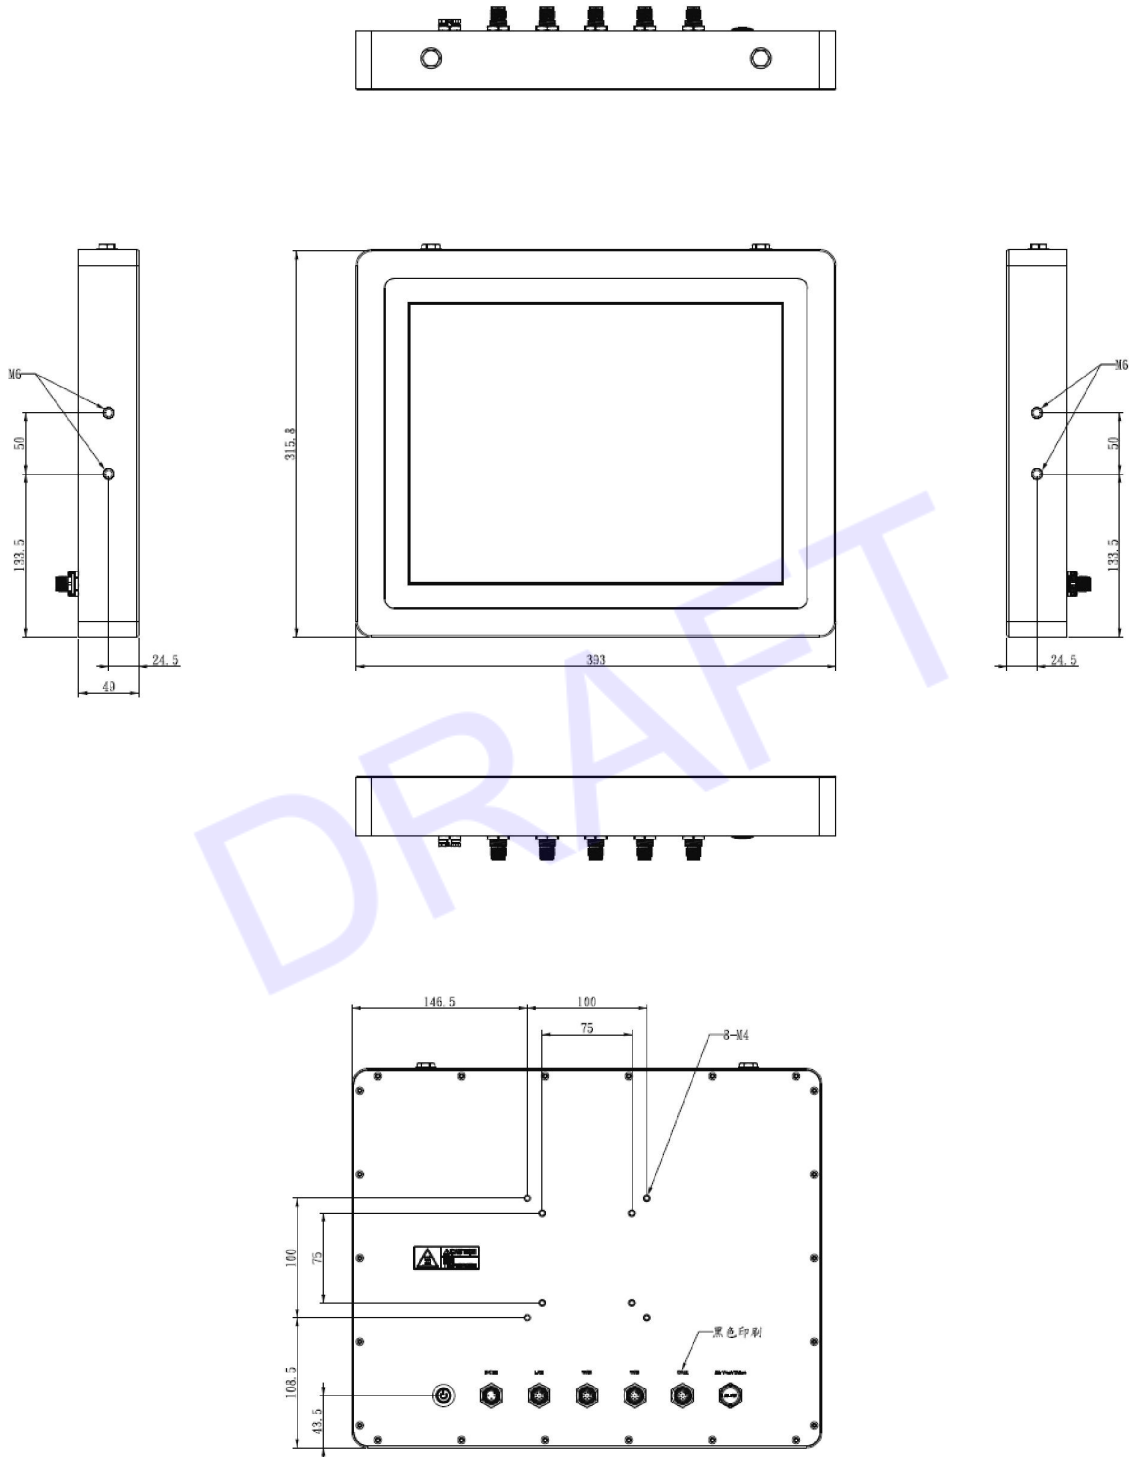

(Unit: mm)

Drawing No.: VPC1500SIP-J-08032023-V1