

MARINE DISPLAYS Marine Grade IP65 Marine Display Sunlight Readable

24" Full IP66 Industrial Panel / 1920x1080 / 1500nits
Stainless Steel with Anti-Corrosion Treatment Enclosures with
VGA, DVI, HDMI and 100-240VAC Power Cord

Optical Bonding AR Glass with Panel



Model: CMRW2400HBOB-SIP

FEATURES:

- 24" Industrial Panel (AUO_G240HVN01.0) / 1920x1080 / 1500nits / High Tri
- AISI-304 Stainless Steel with Anti-Corrosion Treatment Enclosures / Full IP66 / Wall Mount
- Optical Bonding AR Glass with Panel
- Conformal Coating
- I/O (All Connectors are Waterproof Connectors / 6ft long): VGA, DVI, HDMI and 100-240VAC Power Cord


SPECIFICATIONS:

Display	Viewing Size Image	24"
	Active Display Area (mm)	535 (H) x 302 (V)
	Pixel Pitch (mm)	0.276(H)x0.276 (V)
	Resolution	1920 x 1080
	Contrast Ratio	3000 : 1 (typ.)
	Color	16.7M(8 bits/colors)
	Brightness	1500nits
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, HDMI, DVI
Power	Source	100-240VAC Power Cord
	Consumption	21W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	Resistive, PCAP,IR
	High Brightness	1000,1500
	Auto Dimming	YES
	POWER in	DC24V,DC9V~36V
	Remote Control	YES
IO	AV, DP, DVI	

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

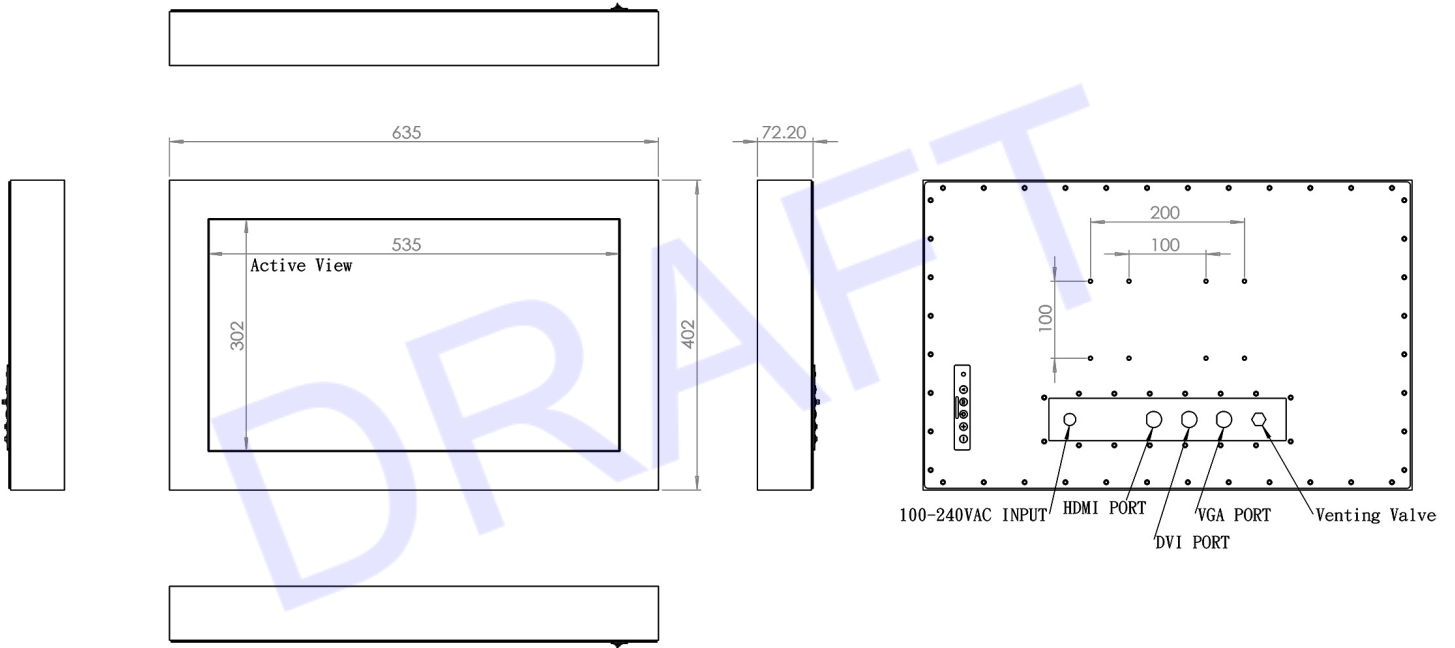

Drawing No.: CMRW2400HBOB-SIP-02032025-V1