12.1" Industrial Panel 1280x800, 450nits, Panel Mount (with 3mm front bezel) / Clamp with VESA mount with Resistive Touch / Front IP65, Speakers I/O: VGA, HDMI, USB (for Touch use) and with external 100-240VAC power adapter MODEL: CPMW1210-TR

FEATURES:

- High Contrast color TFT LCD Monitor support resolution up to XGA (1280 x 800)
- Power management system conforms to VESA DPMS and EPA
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting application.
- Custom design by request.

SPECIFICATIONS:

Display	Viewing Size Image	12.1"
	Active Display Area (mm)	262.50 (H) x 164.50 (V)
	Pixel Pitch (mm)	0.204 x 0.204
	Resolution	1280 x 800
	Contrast Ratio	1000:1 (typ.)
	Color	262K / 16.2M
	Brightness	450 nits
	Viewing Angle	-88~88 (H) ; -88~88 (V)
	Recommended Resolution	1280 x 800 @ 60Hz, 75Hz
	Signal Connector	VGA, HDMI, USB (for Touch use)

	Source	12VDC with external 100-240VAC power adapter
Power	Consumption	10.15W Max.
	Management	VESA DPMS Compliant
	Touch	Resistive, PCAP
	High Brightness	1000,1500
Ontional	Auto Dimming	YES
Optional	POWER in	DC24V,DC 9V~36V
	Remote Control	YES
	Ю	AV, DP

^{*}Specifications subject to change without notice, not responsible for typographical errors.




-Tech Company LLC


EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com


MECHANICAL DRAWING:


This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.







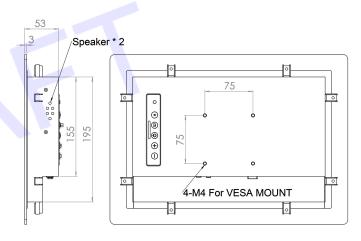



Drawing No.: CPMW1210-TR-06012023-V1

i-Tech Company LLC EMAIL: <u>info@itechlcd.com</u> • WEB: <u>www.iTechlCD.com</u>