

# CHASSIS VESA MOUNT LCD MONITOR



24" Chassis / 1920x1200 / 300nits LED / VGA+DVI+HDMI Input  
Side OSD / DC12V Power input / VESA Mount

**Model: CCHW2400X-V2**

## FEATURES:

- High Contrast TFT LCD Monitor with support for resolutions up to FULL HD (1920x1200).
- Power management system adhering to VESA DPMS and EPA Energy Star standards.
- Comprehensive support for touch screen installation and application.
- Equipped with a universal power adapter for versatility.
- Plug & Play compatibility through DDC1 & DDC2B support.
- Advanced OSD control for precise picture quality adjustment.
- Detachable stand designed for wall-mounting applications.
- Robust monitor featuring a durable steel frame.
- Customizable design available upon request.

## SPECIFICATIONS:

Active Area	[mm]	518.4 (H)x 324 (V)
Pixels H x V		1920(x3)x1200
Pixel Pitch	[mm]	0.270 (per one triad) x 0.270
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		AHVA mode, Normally Black
White Luminance	[cd/m <sup>2</sup> ]	300 (center, Typ) @ 60mA
Contrast Ratio		1000 : 1 (Typ)
Optical Response Time	[msec]	14 (Typ., on/off)
Power Supply Input Voltage (VDD)	[Volt]	+12V
Weight	[Grams]	2500(Typ)
Physical Size (Hx VxD)	[mm]	551.4 (H)x 357 (V) x 56 (D) (Typ)
Electrical Interface		Dual channel LVDS
Surface Treatment		Anti-Glare Treatment
Support Color		1.07B colors
Temperature Range		
Operating	[°C]	0 to +40
Storage (Non-Operating)	[°C]	-20 to +50
RoHS Compliance		RoHS Compliance


*\*Specifications subject to change without notice, not responsible for typographical errors.*

## APPLICATIONS:



## MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

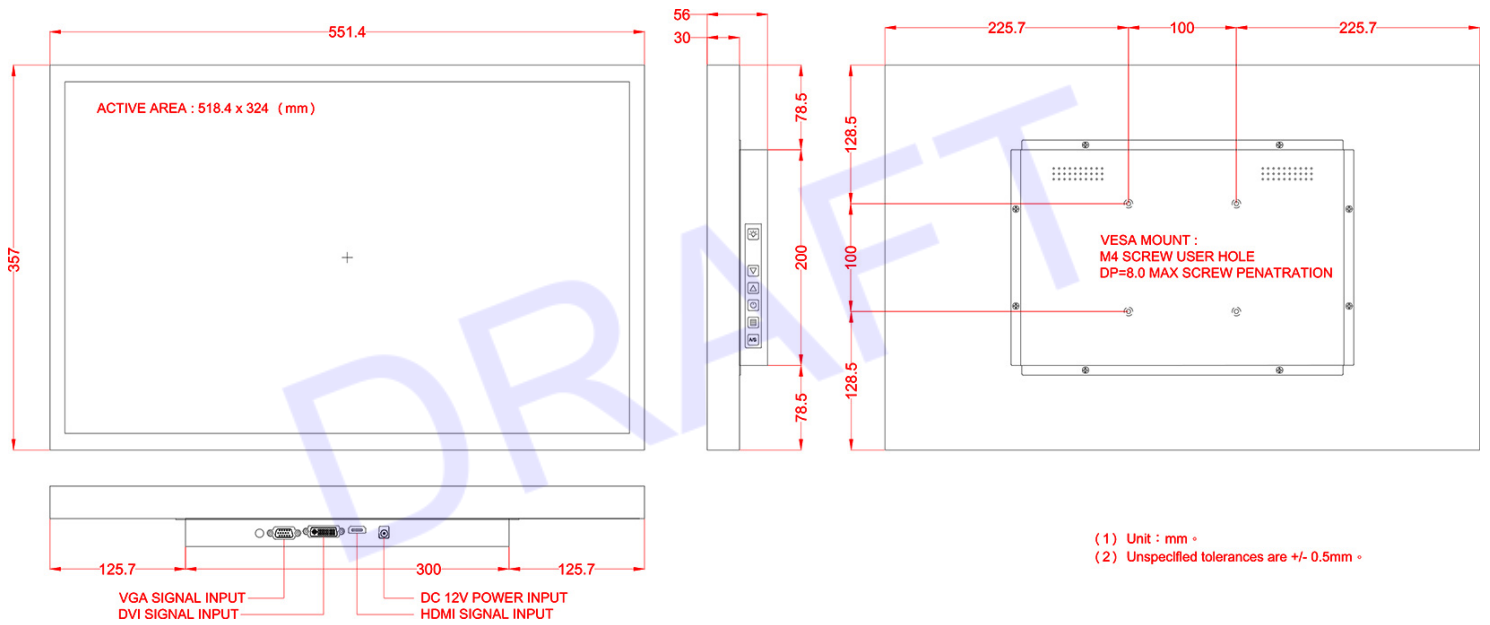

- (1) Unit : mm -
- (2) Unspecified tolerances are +/- 0.5mm -

Drawing No.: CCHW2400X-V2-11142023-V1