


INDUSTRIAL CHASSIS/VESA MOUNT 4K MONITOR

Chassis/VESA Mount 27" 4K Flat surface multi touch Monitor / 3840x2160 / 350nits / PCAP Touch with USB controller (10-points in Win7/10), Audio In & out , VGA , DP x 2, HDMI x 2 with Projected Capacitive Touch

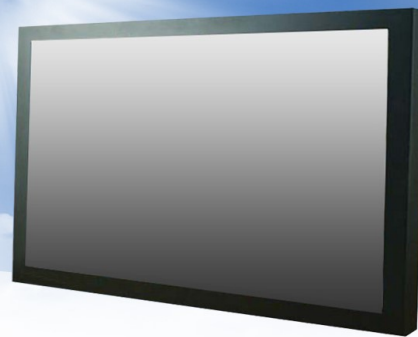

Model: YCHW2700-4K-PCAP

FEATURES:

- 27" TFT LCD with resolution up to 3840 x 2160.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


SPECIFICATIONS

Screen Diagonal	27.0-inch
Active Display Area (mm)	596.736 (H) x 335.664 (V)
Pixel Pitch (mm)	0.1554(H) *0.1554(V)
Number of Pixels	3840 (H)x 2160 (V)
Contrast Ratio	1000:1
Display Color	1.07 B(8bit+A-FRC) Colors
Brightness (cd/ni)	350 cd/ni (Without Touch Screen)
Viewing Angle(Typ.)	89 / 89 / 89 / 89 (R/L/U/D)
Signal Connector	Audio In & out, VGA , DP x 2, HDMIx2
Power Source	DC+12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-0 ~ +50 °C
Storage Temperature	-20 ~ +60°C
Plug & Play	VESA DDC 1/2B
Touch Type	Projected Capacitive Touch
Transparency	> 85% (typ.)
Hardness of surface	6H
Linearity	±1.5%(max.)
Touch Interface	USB Type B

**Specifications subject to change without notice, not responsible for typographical errors.*


MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

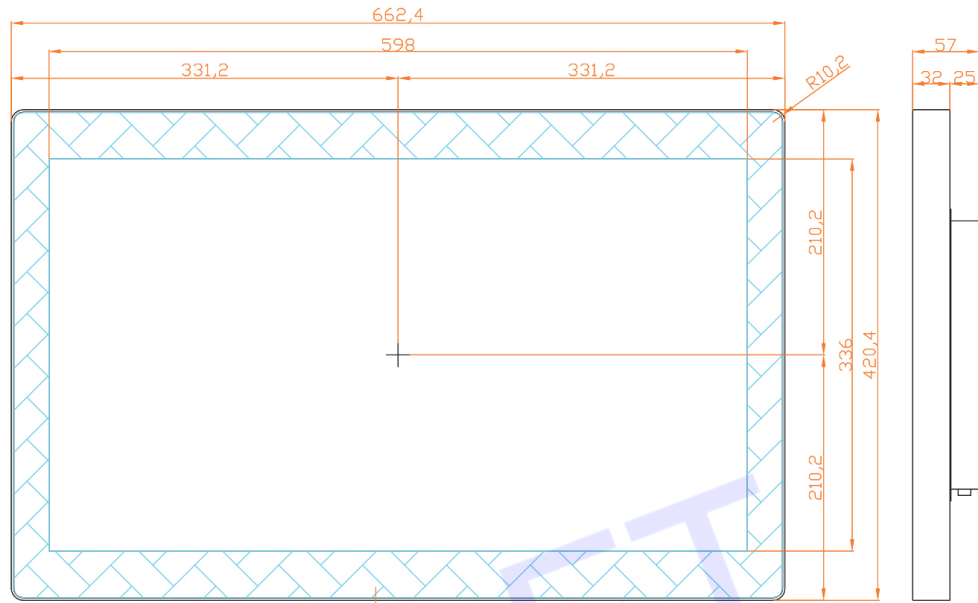

- (A): Audio Output
- (B): Audio Input
- (C): VGA Signal Input
- (D): Display Port1 Signal Input & Display Port2 Signal Input
- (E): HDMI 1 Signal Input & HDMI 2 Signal Input
- (F): DC+12V Power Input
- (G): Touch USB Type B

M3 User_Hold_x9 (DP=5mm_Max.)

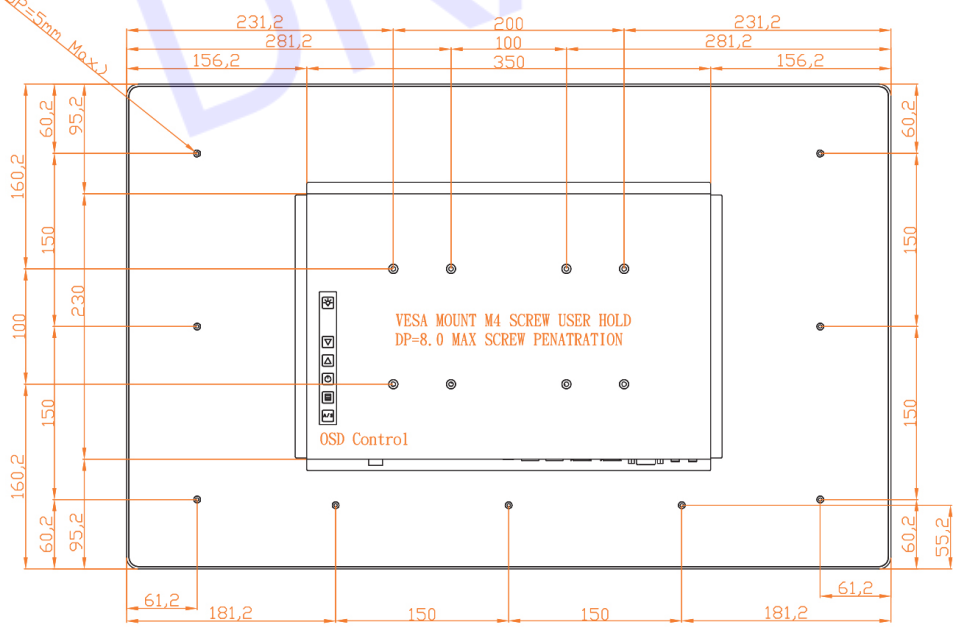

Note :
 (1) Unit : mm *
 (2) Unspecified tolerances are +/- 0.5mm.