

INDUSTRIAL PANEL MOUNT (6mm Aluminum Front Bezel)

Front IP65 / Front OSD with Hot Key Control Brightness
19" TFT / 1280x1024 / 1000nits-LED / Panel Mount / VESA Mount
VGA+DVI+HDMI Signal Input / AR Coating Glass / DC 9-36V Power Input
NON TOUCH

Integrated Add Heater for Operating Temp. : -40°C ~ +70°C



Model: YPM1900HB-H

FEATURES:

- Supports 1280x1024 resolution with high contrast TFT-LCD display
- VESA DPMS and EPA Energy Star power management compliant
- Touch screen compatible
- Includes universal power adapter
- Plug & Play support (DDC1 & DDC2B)
- Advanced OSD controls for picture adjustment
- Detachable stand for wall mounting
- Heavy-duty steel frame for durability


SPECIFICATIONS:

ITEM	SPECIFICATION
Panel Type	19.0-inch TFT LCD
Screen Diagonal	19.0-inch
Active Display Area (mm)	376.32 (H) x 301.06 (V)
Pixel Pitch (mm)	0.294 (per one triad) × 0.294
Number of Pixels	1280 x 3(RGB) x 1024
Contrast Ratio	1000:1
Display Color	16.7M colors (RGB 6-bit + Hi-FRC)
Brightness (cd/mi)	1000 cd/m (Without touch screen)
Viewing Angle(Typ.)	85 / 85 / 80 / 80 (R/L/U/D)
Signal Connector	15 PIN D-Sub, DVI-D, HDMI
Power Source	DC 9-36V Power Input
Power Management	VESA DPMS Compliant
Operating Temperature	-40 ~ +70°C
Storage Temperature	-10 ~ +70°C
Plug & Play	VESA DDC 1/2B

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

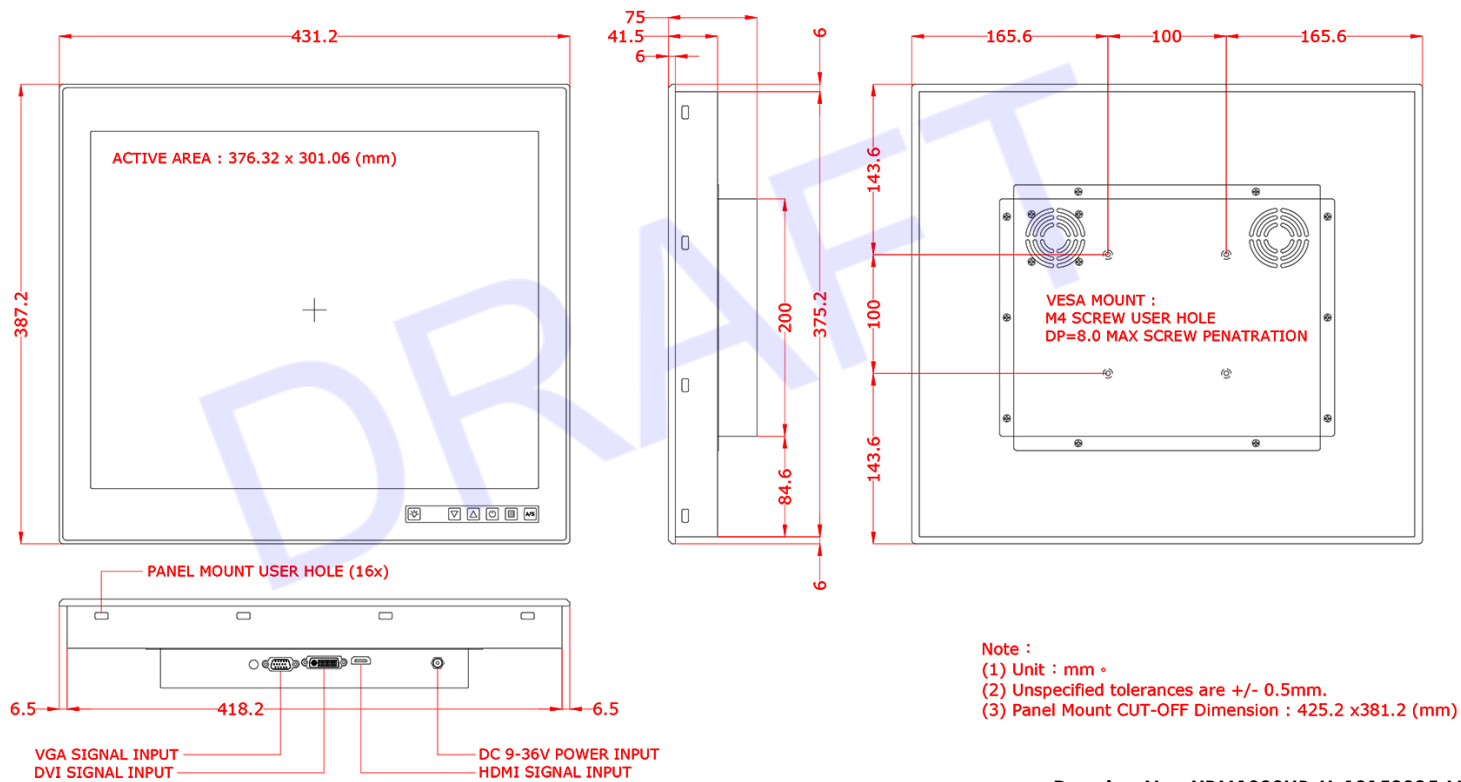

Drawing No.: YPM1900HB-H-10152025-V1