

# SUNLIGHT READABLE PANEL MOUNT (ALUMINUM-6MM)

6mm Aluminum Front Bezel / 15.6" TFT / 1920x1080 / 1000nits-LED / Panel Mount / VESA Mount / VGA+DVI+HDMI Signal input / -30 to +85C / Rear OSD / AR coating Glass / AC 90-264V Power Input



**Model: YPMW1560HB-WT**

## FEATURES:

- 15.6" / 1920x1080
- Sunlight Readable 1000nits Brightness
- VGA+DVI-D+HDMI Signal Input
- Panel Mount / VESA Mount
- AR Coating Glass


## SYSTEM SPECIFICATIONS:

Panel Type	15.6-inch TFT LCD
Screen Diagonal	15.6-inch
Active Display Area (mm)	344.2(H) x 193.56(V)
Number of Pixels	1920x1080
Contrast Ratio	700:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m <sup>2</sup> )	1000 cd/m <sup>2</sup>
Viewing Angle(Typ.)	80/80/70/70 (R/L/U/D)
Signal Connector	VGA+DVI+HDMI
Power Management	VESA DPMS Compliant
Operating Temperature	-30°C ~ +85°C
Plug & Play	VESA DDC 1/2B
Transparency	90%(typ).
Hardness of surface	7H

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

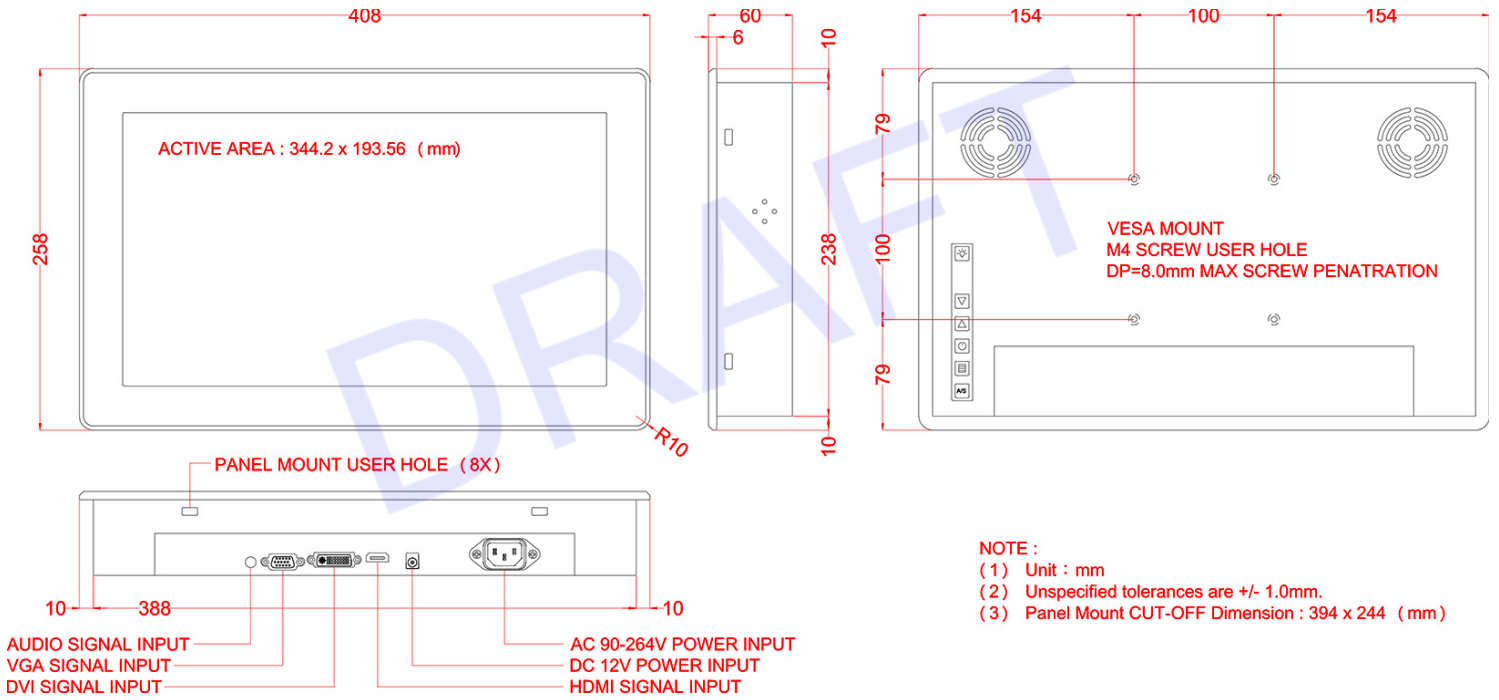

### NOTE :

- (1) Unit : mm
- (2) Unspecified tolerances are +/- 1.0mm.
- (3) Panel Mount CUT-OFF Dimension : 394 x 244 ( mm )

Drawing No.: YPMW1560HB-WT -05312023-V1